



DIN EN 806  
DIN EN 1717  
DIN 1988




**bar**



max. 10  
0,5 1 5

**°C**

max. 70°  
60°



2,5mm

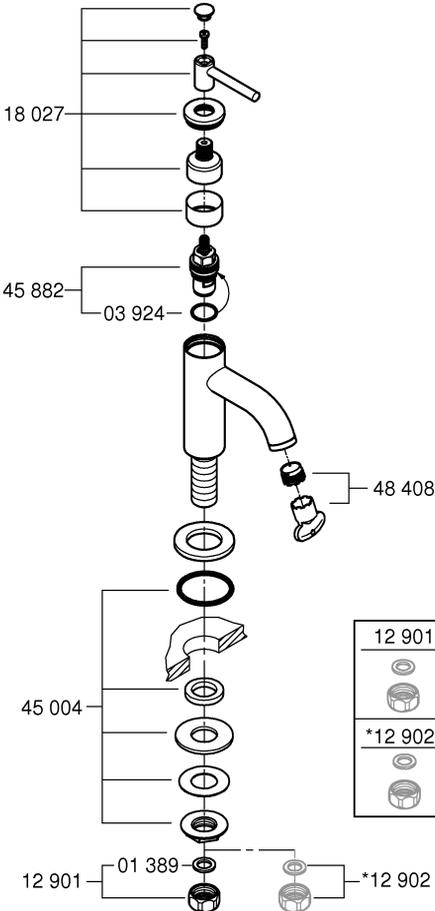

12 901	
*12 902	



