


Data Sheet | Item Number: 852-1505/000-001
Industrial-Managed-Switch; 8-Port 1000BASE-T; 4-Slot 1000BASE-SX/LX; Extended temperature range; 8 * Power over Ethernet; USB

<https://www.wago.com/852-1505/000-001>

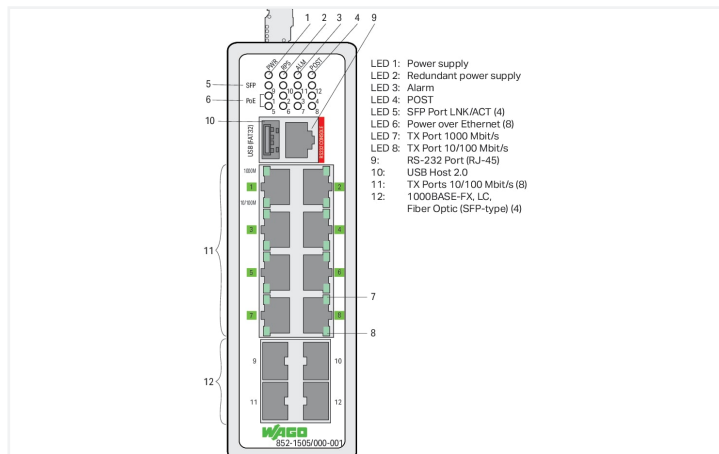

The configurable 852-1505/000-001 Industrial ETHERNET Switch features eight 10/100/1000BASE-T ports that all support Power over Ethernet (PoE+) at 30 W, and has four 1000BASE-SX/LX SFP slots (SFP modules are available as an option). All eight PoE+ ports can be operated simultaneously.

Packaged in a rugged housing, this switch offers both a redundant power supply and relay-based function monitoring. These functions, along with extensive ETHERNET switch options, make it ideal for a wide range of applications.

Features:

- Web-based/SNMP management
- Redundant DC power supply
- Power supply range: 24 ... 57 VDC
- Diagnostics via Modbus® and SNMP
- DIP switch to set alarm functions
- Auto-negotiation at all 10/100/1000BASE-T ports
- Auto-MDI/MDIX (crossover) at all 10/100/1000BASE-T ports
- IGMP snooping for multicast filtering
- Port configuration, status, statistics
- Port trunking
- SNMP v1/v2c and RMON
- Approval (IEC 61850-3) for the energy market
- Firmware update and switch configuration via USB storage medium

Technical data

Switching mode	Store-and-forward; non-blocking
Number of 1 Gbit/s ports	8
Number of 1 Gbit/s SFP ports	4
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3x Flow Control IEEE 802.1d Spanning Tree Protocol (STP) IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) IEEE 802.1s Multiple Spanning Tree Protocol (MSTP) IEEE 802.1Q VLAN Tagging IEEE 802.1p Prioritization IEEE 802.1X Port Authentication IEEE 802.1ab Link Layer Discovery Protocol (LLDP) IEEE 802.3ad Link Aggregation IEEE 802.3af Power over Ethernet (PoE) IEEE 802.3at High Power over Ethernet (PoE+) ITU-T G8032v1/v2 Ethernet Ring Protection Switching (ERPS)
Redundancy function	Redundant DC power supply; STP; RSTP; MSTP; Jet Ring < 300 ms; Xpress Ring < 20 ms; Dual Homing < 20 ms; Dual Ring; ERPSv2 < 50 ms; LCAP
Configuration options	DIP switch for signal contact Web-Based Management Command Line Interface SNMPv1/v2c/v3 USB storage medium

Technical data

Diagnostics	Signal contact; Modbus TCP; Port status; Port statistics; Port load; Traffic monitor; SFP information; Syslog; Mail alarm; SNMP traps; Loop detection; ...
MAC table (size)	16000 addresses
Jumbo frame size	10000 bytes
Supply voltage	24 ... 57 VDC
Power consumption (max.)	18 W
Power consumption (note)	258 W with 8 PoE+
ESD (contact/air discharge)	8 KV / 15 KV
Baud rate	Copper cable: 10/1000 Mbit/s; Fiber optic: 1000 Mbit/s
Transmission medium (communication/fieldbus)	Copper cable: Cat. 5e or higher, 100 m maximum cable length; Fiber optic: SX Multi-Mode, LX Single-Mode
Optical fiber type	Single-mode and multi-mode
VLAN	Port-based and tag-based (4k VLANs)
Controls	14 x DIP switch: Alarm function power supplies and ports 1 ... 12
Indicators	Device: LED (PWR, RPS, POST) green: power supply (primary), redundant power supply (secondary), POST function; LED (ALM) red: Alarm; LED (SFP) green, Status fiber optic ports; per port: LED (1000M, 10/100M) green, yellow: Status 1000 Mbps, 10/100 Mbps ports 1 ... 8

Connection data

Connection technology: communication/fieldbus	Copper cable: 8 x RJ-45; Fiber optic: 4 x SFP slots (e.g., with SFP module and LC fiber-optic connector)
Connection technology: supply	1 x Built-in male connector: 231-436/001-000; included female connector (MCS Connectors): 2231-106/026-000

Physical data

Width	50 mm / 1.969 inches
Height	162 mm / 6.378 inches
Depth	120 mm / 4.724 inches

Mechanical data

Weight	955 g
Housing material	Aluminum
Conformity marking	CE

Environmental requirements

Ambient temperature (operation)	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +80 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2
EMC emission of interference	per EN 61000-6-4
Fire load	0.302 MJ

Commercial data

ETIM 8.0	EC000734
ETIM 7.0	EC000734
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	TW
GTIN	4055143897969
Customs tariff number	85176200000

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungs- stelle	TP TC 020/2011	EAC RU C-DE.AM02. B.00087/19
IEC Interocean EMC Technolo- gy Corp.	IEC 61850-3	18A092117E_C
UL Underwriters Laboratories Inc. (ORDINARY LOCATI- ONS)	UL 61010-2-201	E175199

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
DNV DNV GL SE	-	TAA00002YN
LR Lloyds Register	-	LR2128525TA

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance
852-1505/000-001



Documentation

Manual			
Product Manual 8 Port 1000BASE-T + 4-Slot 1000BASE SX-LX Industrial Managed Switch	V 1.1.0 15.04.2021	pdf 16153.25 KB	↓

Bid Text			
852-1505/000-001	22.05.2019	docx 17.54 KB	↓
852-1505/000-001	22.05.2019	xml 7.80 KB	↓
ausschreiben.de 852-1505/000-001			↓

CAD/CAE-Data

CAD data	
2D/3D Models 852-1505/000-001	↓

CAE data	
EPLAN Data Portal 852-1505/000-001	↓
ZUKEN Portal 852-1505/000-001	↓

Runtime Software

Firmware			
0852-1505/000-001, Industrial-Managed-Switch	V 12 01.10.2021	zip 12669.18 KB	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Cables and connectors

1.1.1.1 Connector plug



[Item No.: 750-979/000-011](#)
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief



[Item No.: 750-979/000-021](#)
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief



[Item No.: 750-979/000-012](#)
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief



[Item No.: 750-979/000-022](#)
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief



[Item No.: 750-977/000-011](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22



[Item No.: 750-978/000-011](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief



[Item No.: 750-977/000-021](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24



[Item No.: 750-978/000-021](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief



[Item No.: 750-977/000-012](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22



[Item No.: 750-978/000-012](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief



[Item No.: 750-977/000-022](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24



[Item No.: 750-978/000-022](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief



[Item No.: 750-979/000-013](#)
Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief



[Item No.: 750-977/000-013](#)
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22



[Item No.: 750-978/000-013](#)
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief



[Item No.: 750-976](#)
PROFINET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly

1.1.2 Interface module

1.1.2.1 Interface module

**Item No.: 289-195**

Interface module; RJ-45; IDC technology;
Cat. 6; in mounting carrier; with shield
connection

1.1.3 Plug

1.1.3.1 SFP module

**Item No.: 852-1210**

SFP Module 1000BASE; LX Single-Mode
1310 nm LC; 10 km; Extended tempera-
ture range; Digital Diagnostics Monitoring;
silver-colored

**Item No.: 852-1200**

SFP Module 1000BASE; SX Multi-Mode
850 nm LC; 0.55 km; Extended tempera-
ture range; DDM; silver-colored

**Item No.: 852-1280**

SFP Module 1000BASE; ZX Single-Mode
1550 nm LC; 80 km; Extended tempera-
ture range; Digital Diagnostics Monitoring;
silver-colored

1.1.4 Power supply

1.1.4.1 Power supply unit

**Item No.: 787-1635**

Switched-mode power supply; Classic; 1-
phase; 48 VDC output voltage; 10 A out-
put current; TopBoost; DC OK contact

**Item No.: 787-1633**

Switched-mode power supply; Classic; 1-
phase; 48 VDC output voltage; 5 A output
current; TopBoost; DC OK contact