



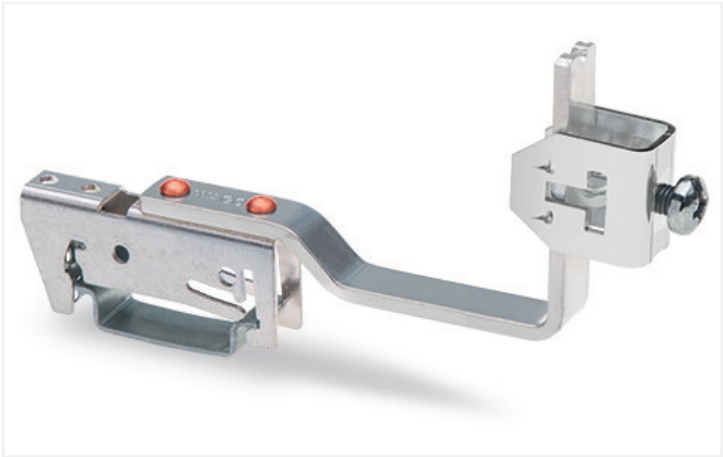

Color: ■ silver-colored

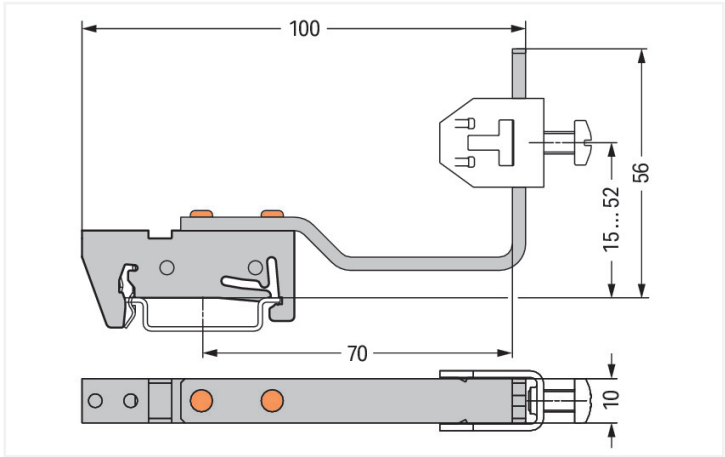

Dimensions in mm

Material data	
Color	silver-colored
Fire load	0 MJ
Weight	42.7 g
Material	Coated steel Stainless steel Copper (Cu)

Commercial data	
eCl@ss 10.0	27-40-06-07
eCl@ss 9.0	27-40-06-07
ETIM 8.0	EC001166
ETIM 7.0	EC001166
PU (SPU)	12 (6) pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143363068
Customs tariff number	85389099990

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 790-350/790-398	

Documentation

Bid Text

790-350/790-398	19.02.2019	xml 2.69 KB	
790-350/790-398	31.08.2017	doc 23.00 KB	

CAD/CAE-Data

CAD data

2D/3D Models 790-350/790-398	
---------------------------------	---

CAE data

EPLAN Data Portal 790-350/790-398	
ZUKEN Portal 790-350/790-398	

1 Compatible Products

1.1 Optional Accessories

1.1.1 N-busbar

1.1.1.1 Mounting accessories




Item No.: 210-133
Busbar; tin-plated; 1000 mm long; Cu 10 mm x 3 mm; white




Item No.: 790-134
Busbar; tin-plated; 50 mm long; Cu 10 mm x 3 mm; silver-colored


Installation Notes





Horizontal mounting position of the busbar



Vertical mounting position of the busbar



The height of the busbar can be adjusted.



Secure the busbar by tightening the screws at the required position.