


Data Sheet | Item Number: 852-1322
Industrial-Managed-Switch; 8-Port 1000BASE-T; MAC Security

<https://www.wago.com/852-1322>

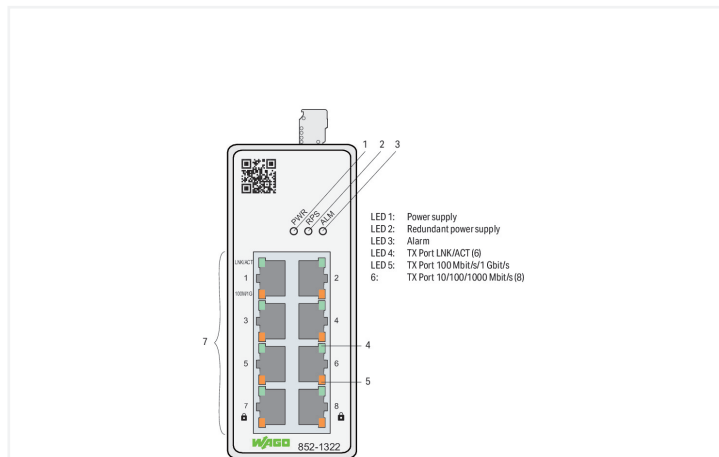

The configurable 852-1322 Industrial ETHERNET Switch is equipped with eight 10/100/1000BASE-T ports. Data encryption complies with IEEE802.1AE (MAC Security Standard) for communication via ports 7 and 8. This functionality, combined with compact dimensions, makes WAGO's managed switch ideal for retrofitting network security during operation of the automation system. The customer application remains unchanged. The optional authentication of the other participants in the network is port-specific in accordance with IEEE 802.1X and RADIUS server. Packaged in a rugged housing, this switch offers a redundant power supply.

Features:

- Web-based (HTTP(S))
- Configuration and diagnostics via SNMPv3
- Redundant DC power supply
- Supply voltage range: 9 ... 48 VDC
- Full compliance with IEEE802.3, 802.3u, 802.3x, 802.3ab, 802.1p, 802.1X, 802.3az and 802.1AE standards
- Non-blocking, store-and-forward switching
- Auto-negotiation at all 10/100/1000BASE-T ports
- Auto-MDI/MDIX (crossover) at all 10/100/1000Base-T ports
- SNMP v1/v2c/v3

Technical data

Switching mode	Store-and-forward; non-blocking
Number of 1 Gbit/s ports	8
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3x Flow Control IEEE 802.1p Prioritization IEEE 802.1X Port Authentication IEEE 802.1Q VLAN Tagging IEEE 802.1AE MAC Security
Redundancy function	Redundant DC power supply
Configuration options	Web-based (HTTP(S)) SNMPv1/v2c/v3
Diagnostics	Modbus TCP; Port status; Syslog; SNMP traps
MAC table (size)	16000 addresses
Supply voltage	9 ... 48 VDC
Power consumption (max.)	5.8 W
ESD (contact/air discharge)	8 KV / 15 KV
Baud rate	Copper cable: 10/1000 Mbit/s
Indicators	Device: LED (PWR, RPS) green: Power supply (primary), redundant power supply (secondary); LED (ALM) red: Alarm; per port: LED (100M/1G, LNK/ACT) green: Status 100 Mbit/s/1 Gbit/s, LNK/ACT ports 1 ... 8

Connection data

Connection technology: communication/fieldbus	Copper cable: 8 x RJ-45
Connection technology: supply	1 x Built-in male connector: 231-435/001-000; included female connector (MCS Connectors): 2231-105/026-000

Physical data

Width	45.3 mm / 1.783 inches
Height	110 mm / 4.331 inches
Depth	92 mm / 3.622 inches

Mechanical data

Weight	628 g
--------	-------

Environmental requirements

Ambient temperature (operation)	-20 ... +70 °C
Ambient temperature (storage)	-40 ... +80 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2
EMC emission of interference	per EN 55011, 55024, 55032 (Class A + B), 61000-6-3, -4
Fire load	0 MJ

Commercial data

ETIM 8.0	EC000734
ETIM 7.0	EC000734
PU (SPU)	1 pcs
Country of origin	TW
GTIN	4055143978163
Customs tariff number	85176200000

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungs- stelle	TP TC 020/2011	EAC RU C-DE.AM02. B.00087/19
UL Underwriters Laboratories Inc. (ORDINARY LOCATI- ONS)	UL 62368-1	E175199

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 852-1322			↓

Documentation

Manual			
Product Manual Industrial Managed Switch	V 1.2.0 14.10.2021	pdf 9384.79 KB	↓

System Description			
Industrial Switches – General Product Information		pdf 1873.93 KB	↓

Bid Text			
852-1322		xml 7.14 KB	↓
852-1322		docx 31.48 KB	↓

CAD/CAE-Data

CAD data			
2D/3D Models 852-1322			↓

CAE data			
EPLAN Data Portal 852-1322			↓

Runtime Software

Firmware			
0852-1322, Industrial-Managed-Switch	V 02 30.08.2021	zip 9128.03 KB	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Cables and connectors

1.1.1.1 Connector plug



[Item No.: 750-979/000-011](#)
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief



[Item No.: 750-979/000-021](#)
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief



[Item No.: 750-979/000-012](#)
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief



[Item No.: 750-979/000-022](#)
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief



[Item No.: 750-977/000-011](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22



[Item No.: 750-978/000-011](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief



[Item No.: 750-977/000-021](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24



[Item No.: 750-978/000-021](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief

1.1.1.1 Connector plug



Item No.: 750-977/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22



Item No.: 750-978/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief



Item No.: 750-977/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24



Item No.: 750-978/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief



Item No.: 750-979/000-013
Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief



Item No.: 750-977/000-013
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22



Item No.: 750-978/000-013
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief



Item No.: 750-976
PROFINET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly

1.1.2 Interface module

1.1.2.1 Interface module



Item No.: 289-195
Interface module; RJ-45; IDC technology; Cat. 6; in mounting carrier; with shield connection

1.1.3 Power supply

1.1.3.1 Power supply unit



Item No.: 787-1602
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 1 A output current; NEC Class 2; DC OK signal



Item No.: 787-1632
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 10 A output current; TopBoost; DC OK contact



Item No.: 787-1606
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 2 A output current; NEC Class 2; DC OK signal



Item No.: 787-1622
Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 5 A output current; TopBoost; DC OK contact



Item No.: 787-1635
Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 10 A output current; TopBoost; DC OK contact



Item No.: 787-1623
Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 2 A output current; DC OK signal



Item No.: 787-1633
Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 5 A output current; TopBoost; DC OK contact