





Color: ■ black

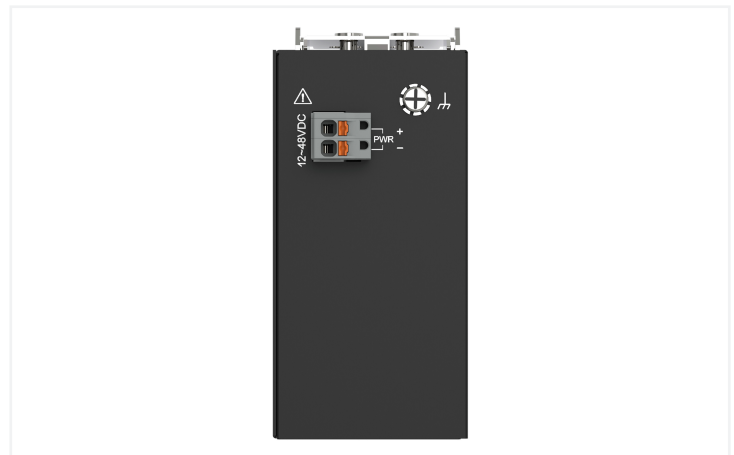

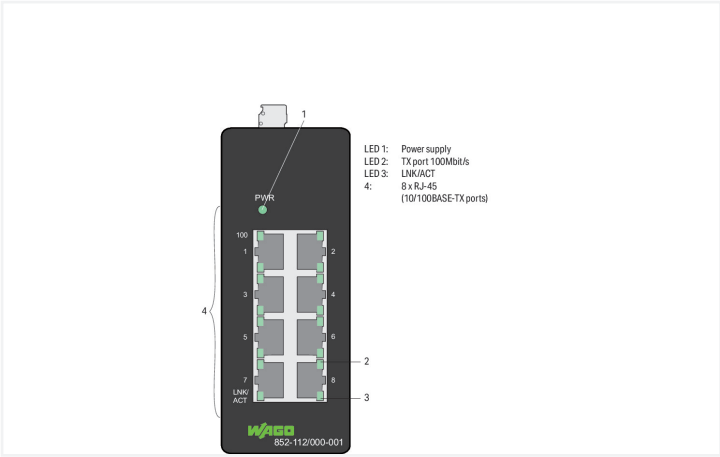

This unmanaged industrial ETHERNET switch (852-112/000-001) has eight Fast ETHERNET ports for easily setting up small- to medium-sized networks. Its slim design paired with a DIN-rail adapter simplifies installation in the control cabinet and provides high vibration and shock resistance. Additionally, automatic transmission rate detection (auto-negotiation) and automatic identification of the transmit and receive lines (Auto MDI-X) allow simple plug-and-play operation, saving time and money during commissioning.

Features:

- 8 10/100 Mbit/s ETHERNET ports autonegotiation
- Front-panel diagnostic LEDs
- Supports Auto-MDI/MDI-X functions
- Full/half-duplex transfer modes for each port
- Store-and-forward switching method
- Integrated address look-up table, supports up to 1000 absolute MAC addresses
- Overvoltage protection
- Data flow control, per IEEE 802.3x Flow Control, in full-duplex mode
- Prioritization of ETHERNET data packets (PROFINET protocol, EtherType=0x8892) per IEEE802.1p
- DIN-35 rail mounting

Technical data

Switching mode	Store-and-forward; non-blocking
Number of 100 Mbit/s ports	8
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3x Flow Control IEEE 802.1p Prioritization
Supply voltage	12 ... 48 VDC
Power consumption (max.)	2 W
Baud rate	Copper cable: 10/100 Mbit/s
Topology	Star
Indicators	Device: LED (PWR) green: Power supply; per port: LED (100, LNK/ACT) green: Status 100 Mbps, LNK/ACT ports 1 ... 8

Connection data

Connection technology: communication/fieldbus	Copper cable: 8 x RJ-45
Connection technology: supply	1 x Built-in male connector: 231-432/001-000; included female connector (MCS Connectors): 2231-102/026-000

Physical data

Width	50 mm / 1.969 inches
Height	116 mm / 4.567 inches
Depth from upper-edge of DIN-rail	100 mm / 3.937 inches

Mechanical data

Weight	472 g
Color	black
Housing material	Sheet steel
Conformity marking	CE

Environmental requirements

Ambient temperature (operation)	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +85 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2
EMC emission of interference	per EN 61000-6-4
Fire load	0 MJ

Commercial data

ETIM 8.0	EC000734
PU (SPU)	1 pcs
Country of origin	TW
GTIN	4066966189681
Customs tariff number	8517620000

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-ISW852
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
852-112/000-001



Documentation

Manual

Product Manual Industrial Eco Switch V 1.0.0 07.10.2021 pdf 6419.29 KB



System Description

Industrial Switches – General Product Information pdf 1873.93 KB



Bid Text

852-112/000-001 xml 6.05 KB



852-112/000-001 docx 30.87 KB



CAD/CAE-Data

CAD data

2D/3D Models
852-112/000-001



CAE data

EPLAN Data Portal
852-112/000-001



1 Compatible Products

1.1 Optional Accessories

1.1.1 Cables and connectors

1.1.1.1 Connector plug



[Item No.: 750-979/000-011](#)
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief



[Item No.: 750-979/000-021](#)
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief



[Item No.: 750-979/000-012](#)
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief



[Item No.: 750-979/000-022](#)
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief



[Item No.: 750-977/000-011](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22



[Item No.: 750-978/000-011](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief



[Item No.: 750-977/000-021](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24



[Item No.: 750-978/000-021](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief



[Item No.: 750-977/000-012](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22



[Item No.: 750-978/000-012](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief



[Item No.: 750-977/000-022](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24



[Item No.: 750-978/000-022](#)
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief



[Item No.: 750-979/000-013](#)
Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief



[Item No.: 750-977/000-013](#)
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22



[Item No.: 750-978/000-013](#)
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief



[Item No.: 750-975](#)
ETHERNET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly

1.1.1.1 Connector plug



Item No.: 750-976

PROFINET RJ-45 connector, IP20; ETHER-NET 10/100 Mbit/s; for field assembly

1.1.2 Interface module

1.1.2.1 Interface module



Item No.: 289-195

Interface module; RJ-45; IDC technology; Cat. 6; in mounting carrier; with shield connection



Item No.: 289-175

Interface module; RJ-45; PCB terminal blocks, double-row; Cat. 5; in mounting carrier; with shield connection; with shield clamping saddle; 1,50 mm²



Item No.: 289-172

Interface module; RJ-45; RJ-45; Cat. 5; in mounting carrier



Item No.: 289-196

Interface module; RJ-45; with power jumper contacts; PCB terminal blocks; Cat. 5

1.1.3 Power supply

1.1.3.1 Power supply unit



Item No.: 787-1102

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 1.3 A output current; DC-OK LED



Item No.: 787-1112

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 2.5 A output current; DC-OK LED



Item No.: 787-1122

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 4 A output current; DC-OK LED



Item No.: 787-1226

Switched-mode power supply; Compact; 1-phase; 24 VDC output voltage; 6 A output current; DC-OK LED



Item No.: 787-1702

Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 1.25 A output current; DC-OK LED



Item No.: 787-1712

Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 2.5 A output current; DC-OK LED



Item No.: 787-1722

Switched-mode power supply; Eco; 1-phase; 24 VDC output voltage; 5 A output current; DC-OK LED