


Data Sheet | Item Number: 852-1305

Industrial Managed Switch; 8 Ports 1000Base-T; 4-Slot 1000BASE-SX/LX; black metallic

<https://www.wago.com/852-1305>

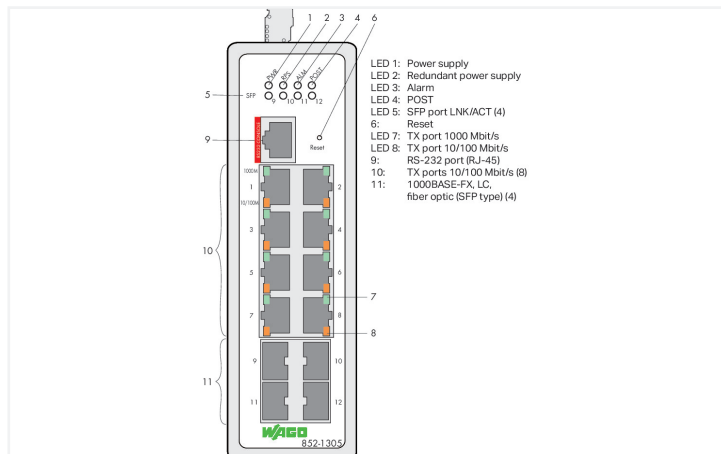

Color: ■ black metallic

The configurable 852-1305 Industrial ETHERNET Switch is equipped with eight 10/100/1000BASE-T ports and four 1000BASE-SX/LX SFP slots (SFP modules are available as an option).

Packaged in a rugged housing, this switch offers both a redundant power supply and relay-based function monitoring. These functions, along with extensive ETHERNET switch options, make it ideal for a wide range of applications.

Features:

- Web-based/SNMP Management
- Redundant DC power supply
- Wide supply voltage range: 12 ... 60 VDC
- DIP switch to set alarm functions
- Fully compatible with IEEE 802.3, 802.3u, 802.3z, 802.3x, 802.3ad, 802.3ab, 802.1d, 802.1q, 802.1p, 802.1w and 802.1x standards
- Xpress Ring (redundant ring, recovery < 50 ms)
- Non-blocking, store-and-forward switching, rapid spanning tree protocol (RSTP)
- Autonegotiation at all 10/100/1000BASE-T ports
- Auto-MDI/MDIX (crossover) at all 10/100/1000BASE-T ports
- VLAN (802.1q) VID
- IGMP snooping for multicast filtering
- Port configuration, status, statistics
- Port trunking
- SNMP v1/v2 and RMON

Technical data

Switching mode	Store-and-forward; non-blocking
Number of 1 Gbit/s ports	8
Number of 1 Gbit/s SFP ports	4
Communication standards	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3ab 1000BASE-T IEEE 802.3z 1000BASE-SX/LX IEEE 802.3x Flow Control IEEE 802.1w Rapid Spanning Tree Protocol (RSTP) IEEE 802.1Q VLAN Tagging IEEE 802.1ab Link Layer Discovery Protocol (LLDP) IEEE 802.1p Prioritization IEEE 802.1X Port Authentication ITU-T G8032v1/v2 Ethernet Ring Protection Switching (ERPS)
Redundancy function	Redundant DC power supply; STP; RSTP; MSTP; Jet Ring < 300 ms; Xpress Ring < 20 ms; Dual Homing < 20 ms; Dual Ring; ERPSv2 < 50 ms; LCAP
Configuration options	DIP switch for signal contact Command Line Interface SNMPv1/v2c/v3
Diagnostics	Signal contact, Modbus/TCP, port status, port statistics, port load, traffic monitor, SFP information, syslog, mail alarm, SNMP traps
MAC table (size)	16000 addresses
Jumbo frame size	10000 bytes

Technical data

Supply voltage	12 ... 60 VDC; Cable length:< 3 m
Power consumption (max.)	18 W
ESD (contact/air discharge)	8 KV / 15 KV
Baud rate	Copper cable: 10/1000 Mbit/s; Fiber optic:1000 Mbit/s
Transmission medium (communication/fieldbus)	Copper cable: Cat. 5 or higher, 100 m maximum cable length; Fiber optic: SX Multi-Mode, LX Single-Mode
Optical fiber type	Single-mode and multi-mode
VLAN	Port-based and tag-based (4k VLANs)
Controls	14 x DIP switch: Alarm function power supplies and ports 1 ... 12; 1 x Reset button: system restart
Indicators	Device: LED (PWR, RPS, POST) green: power supply (primary), redundant power supply (secondary), POST function; LED (ALM) red: Alarm; LED (SFP) green, Status fiber optic ports; per port: LED (100, LNK/ACT) green: Status 100 Mbps, LNK/ACT ports 1 ... 8

Connection data

Connection technology: communication/fieldbus	Copper cable: 8 x RJ-45; Fiber optic: 4 x SFP slots (e.g., with SFP module and LC fiber-optic connector)
Connection technology: supply	1 x Built-in male connector: 231-436/001-000; included female connector (MCS Connectors): 2231-106/026-000

Physical data

Width	50 mm / 1.969 inches
Height	162 mm / 6.378 inches
Depth	120 mm / 4.724 inches

Mechanical data

Weight	910 g
Color	black metallic
Housing material	Aluminum
Conformity marking	CE

Environmental requirements

Ambient temperature (operation)	-40 ... +70 °C
Ambient temperature (storage)	-40 ... +80 °C
Protection type	IP30
Relative humidity (without condensation)	95 %
Mounting type	DIN-35 rail
Vibration resistance	per IEC 60068-2-6
Shock resistance	per IEC 60068-2-27
EMC immunity to interference	per EN 61000-6-2
EMC emission of interference	per EN 61000-6-4
Fire load	0.302 MJ

Commercial data

eCl@ss 10.0	19-17-01-30
eCl@ss 9.0	19-17-01-06
ETIM 8.0	EC000734
ETIM 7.0	EC000734
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	TW
GTIN	4055143327169
Customs tariff number	8517620000

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungsstelle	TP TC 020/2011	EAC RU C-DE.AM02. B.00087/19
KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-ISW852
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
DNV GL Det Norske Veritas, Germanischer Lloyd	DNVGL-CG-339, Nov. 2016	TAA0000239

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 852-1305



Documentation

Manual

Product Manual 8-Port 1000BASE-T + 4-Slot 1000BASE-SX/LX Industrial Switch	V 1.3.1 18.01.2022	pdf 14717.13 KB	↓
--	-----------------------	--------------------	-------------------

System Description

Industrial Switches – General Product Information	pdf 1873.93 KB	↓
---	-------------------	-------------------

Bid Text

852-1305	09.05.2018	docx 18.65 KB	↓
852-1305	19.02.2019	xml 6.27 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models 852-1305	↓
-----------------------	-------------------

CAE data

EPLAN Data Portal 852-1305	↓
WSCAD Universe 852-1305	↓
ZUKEN Portal 852-1305	↓

Runtime Software

Firmware

0852-1305, Industrial-Managed-Switch	V 12 01.10.2021	zip 10170.12 KB	↓
--------------------------------------	--------------------	--------------------	-------------------

Libraries

Device Description File

MIB-Datei für Managed Switch 852-1305	22.07.2016	MIB 21.35 KB	↓
MIB-Datei für Managed Switches 852	22.07.2016	mib 15.30 KB	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Cables and connectors

1.1.1.1 Connector plug



Item No.: 750-979/000-011
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 22; Strain relief



Item No.: 750-979/000-021
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568A; AWG 24; Strain relief



Item No.: 750-979/000-012
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 22; Strain relief



Item No.: 750-979/000-022
Connector ETHERNET; RJ-45; Cat. 6A; angled; Code T568B; AWG 24; Strain relief



Item No.: 750-977/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22



Item No.: 750-978/000-011
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 22; Strain relief



Item No.: 750-977/000-021
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24



Item No.: 750-978/000-021
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568A; AWG 24; Strain relief



Item No.: 750-977/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22



Item No.: 750-978/000-012
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 22; Strain relief



Item No.: 750-977/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24



Item No.: 750-978/000-022
Connector ETHERNET; RJ-45; Cat. 6A; straight; Code T568B; AWG 24; Strain relief



Item No.: 750-979/000-013
Connector PROFINET; RJ-45; Cat. 6A; angled; AWG 22; Strain relief



Item No.: 750-977/000-013
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22



Item No.: 750-978/000-013
Connector PROFINET; RJ-45; Cat. 6A; straight; AWG 22; Strain relief



Item No.: 750-975
ETHERNET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly



Item No.: 750-976
PROFINET RJ-45 connector, IP20; ETHERNET 10/100 Mbit/s; for field assembly

1.1.2 Interface module

1.1.2.1 Interface module



Item No.: 289-195
Interface module; RJ-45; IDC technology; Cat. 6; in mounting carrier; with shield connection



Item No.: 289-175
Interface module; RJ-45; PCB terminal blocks, double-row; Cat. 5; in mounting carrier; with shield connection; with shield clamping saddle; 1,50 mm²



Item No.: 289-172
Interface module; RJ-45; RJ-45; Cat. 5; in mounting carrier



Item No.: 289-196
Interface module; RJ-45; with power jumper contacts; PCB terminal blocks; Cat. 5

1.1.3 Plug

1.1.3.1 SFP module



Item No.: 852-1210
SFP Module 1000BASE; LX Single-Mode 1310 nm LC; 10 km; Extended temperature range; Digital Diagnostics Monitoring; silver-colored



Item No.: 852-1200
SFP Module 1000BASE; SX Multi-Mode 850 nm LC; 0.55 km; Extended temperature range; DDM; silver-colored



Item No.: 852-1280
SFP Module 1000BASE; ZX Single-Mode 1550 nm LC; 80 km; Extended temperature range; Digital Diagnostics Monitoring; silver-colored

1.1.4 Power supply

1.1.4.1 Power supply unit



Item No.: 787-1602

Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 1 A output current; NEC Class 2; DC OK signal



Item No.: 787-1632

Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 10 A output current; TopBoost; DC OK contact



Item No.: 787-1606

Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 2 A output current; NEC Class 2; DC OK signal



Item No.: 787-1622

Switched-mode power supply; Classic; 1-phase; 24 VDC output voltage; 5 A output current; TopBoost; DC OK contact



Item No.: 787-1635

Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 10 A output current; TopBoost; DC OK contact



Item No.: 787-1623

Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 2 A output current; DC OK signal



Item No.: 787-1633

Switched-mode power supply; Classic; 1-phase; 48 VDC output voltage; 5 A output current; TopBoost; DC OK contact