


|                                |                                                                                                                     |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------|
| Category (ETIM):               | diffuser luminaire                                                                                                  |
| Type:                          | WBLR LED                                                                                                            |
| Order number:                  | 25340144110                                                                                                         |
| Configuration:                 | Lamps integrated: LED, Light colour 830/warm white (3000K), Colour rendering Ra=80; LED service life 50000h L80/B10 |
| Operating device:              | Electronic driver + motion sensor S9 (1 pcs.)                                                                       |
| Mains voltage:                 | 230V / 50Hz                                                                                                         |
| System performance (W):        | 29                                                                                                                  |
| Luminaire luminous flux (lm):  | 2500                                                                                                                |
| lm/W:                          | 88                                                                                                                  |
| Impact resistance (IK rating): | IK02 TA+25°C                                                                                                        |
| Certifications:                | IP 40, protection class I, BAP 65°<3000, Glow-wire flammability test 650°C, Impact resistance 0.20J, F, Indoor, CE  |
| Colour of the housing:         | traffic white RAL 9016                                                                                              |
| Weight (net) (kg):             | 2.6                                                                                                                 |
| Dimensions LxWxH/DxH (mm):     | 477 x 150                                                                                                           |
| Cable entry KE X/Y (mm):       | 103 / 0                                                                                                             |
| mounting method:               | Surface single mounting, Wall surface-mounting                                                                      |
| EAN-number:                    | 4020863334308                                                                                                       |
| Commodity code:                | 94051040                                                                                                            |

## WBLR/500 LED 2500lm 830 • vw • S9 • 25340144110



**Lighting technology**  
Diffuser, opal-direct/indirect distribution  
WBLR/500 LED 2500 lm 830

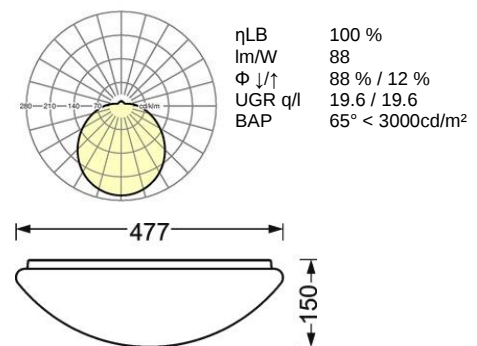

diffuser luminaire; Round luminaire housing made of deep-drawn sheet steel; Housing colour traffic white RAL 9016; Round domed acrylic glass diffuser, with opal matt smooth surface. With integrated HF motion sensor. Range 1 m - 8 m continuously adjustable. Coverage angle of 360° with a coverage area of 160°. Time setting 30 sec - 30 min. and brightness threshold value of 2 to 2000 lx. As master luminaire up to 1000 W (ohmic load). Electrical connection via 5-pole connection terminal with plug-in contacts.

Dimensions LxWxH/DxH (mm): 477 x 150  
Cable entry KE X/Y (mm): 103 / 0  
Configuration: Lamps integrated: LED, Light colour 830/warm white (3000K), Colour rendering Ra=80; LED service life 50000h L80/B10  
Luminaire luminous flux (lm): 2500  
lm/W: 88  
Operating device: Electronic driver + motion sensor S9 (1 pcs.)  
System performance (W): 29  
Impact resistance (IK rating): IK02 TA+25°C  
Certifications: IP 40, protection class I, BAP 65°<3000, Glow-wire flammability test 650°C, Impact resistance 0.20J, F, Indoor, CE

Regiolux GmbH  
Type: WBLR/500 LED 2500 830 S9 vw  
Article number: 25340144110  
Product deep link: <http://www.regiolux.de/en/article/25340144110>  
5 year guarantee after registration on website.