

### Heat shrinkable tubing 3:1 in a kit

#### ShrinKit 321 Universal - 975pcs - coloured

With ShrinKit 321 HellermannTyton has set a new standard in heat shrink tubing: ShrinKit tubings cover many applications with their ideal shrink ratio of 3:1.


#### Features and benefits

- Wide range of sizes, colours and lengths
- For insulation, bend protection and identification
- Compartment sizes changeable by simply moving yellow space dividers



ShrinKit 321 Universal - 975 pcs 3:1 heat shrink assortment.

<b>MATERIAL</b>	Polyolefin, cross-linked (PO-X)
<b>Shrink Ratio</b>	3:1
<b>Operating Temperature</b>	-55 °C to +135 °C
<b>Min. Shrink Temperature</b>	+90 °C
<b>Longitudinal Change After Shrinkage</b>	+5 %/-10 % max.
<b>Dielectric Strength</b>	20 kV/mm
<b>Flammability</b>	self-extinguishing (except for transparent)
<b>Insulation Class</b>	B (VDE 0530)

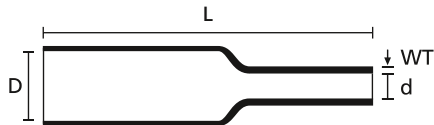

Heat Shrinkable Tubing 3:1



COMP.	Supplied Ø D min.	Recov. Ø d max.	Length (L)	Wall (WT)	Colour	Content	Tools	Article-No.
1	6.0	2.0	60.0	0.70	Black (BK)	50 pcs.	30;32	380-03002
2	12.0	4.0	100.0	0.70	Black (BK)	15 pcs.		
3	24.0	8.0	200.0	1.00	Black (BK)	10 pcs.		
4	6.0	2.0	60.0	0.70	Green-Yellow (GNYE)	50 pcs.		
5	3.0	1.0	50.0	0.55	Transparent (CL)	100 pcs.		
6	3.0	1.0	50.0	0.55	Black (BK)	100 pcs.		
7	12.0	4.0	100.0	0.70	Transparent (CL)	15 pcs.		
8	12.0	4.0	100.0	0.70	Red (RD)	15 pcs.		
9	3.0	1.0	50.0	0.55	Red (RD)	100 pcs.		
10	3.0	1.0	40.0	0.55	Blue (BU)	100 pcs.		
11	3.0	1.0	40.0	0.55	Green-Yellow (GNYE)	100 pcs.		
12	1.5	0.5	40.0	0.45	Black (BK)	75 pcs.		
	1.5	0.5	40.0	0.45	Green-Yellow (GNYE)	75 pcs.		
13	6.0	2.0	60.0	0.70	Blue (BU)	50 pcs.		
14	6.0	2.0	60.0	0.70	Red (RD)	50 pcs.		
15	6.0	2.0	60.0	0.70	Transparent (CL)	50 pcs.		
16	12.0	4.0	170.0	0.70	Green-Yellow (GNYE)	10 pcs.		
17	12.0	4.0	170.0	0.70	Blue (BU)	10 pcs.		

All dimensions in mm. Subject to technical changes. Minimum Order Quantity (MOQ) may differ from package content.

