



Heat shrinkable tubing up to 3:1 - 1 m lengths

TREDUX - thin wall

TREDUX thin wall heat shrink tubing is used for general electrical insulation and mechanical protection of cables and wires.

Features and benefits

- Thin wall, flexible, cross-linked polyolefin tubing
- 1m shrink tubing lengths delivered in handy display carton
- 9 sizes from 1.5 mm to 101.6 mm
- All tubings can be sold in single 1 meter length or entire box





TREDUX shrinks a maximum of 3:1.



**More colours on request.
Please contact us.**

MATERIAL	Polyolefin, cross-linked (PO-X)	
Shrink Ratio	2:1	3:1
Operating Temperature	-55 °C to +135 °C	
Min. Shrink Temperature	+70 °C	
Longitudinal Change After Shrinkage	+/- 5 %	
Dielectric Strength	20 kV/mm	
Flammability	self-extinguishing, UL 224 VW-1	

RoHS ✓

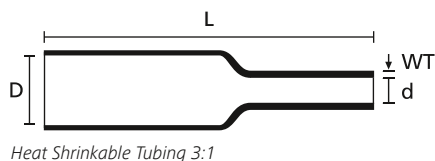

TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Pack Cont.	Colour	Shrink Ratio	Tools	Article-No.
TREDUX-1.5/0.5	1.5	0.5	0.45	1.0 m	20 pcs.	Black (BK)	3:1	30	319-00150
	1.5	0.5	0.45	1.0 m	20 pcs.	Green-Yellow (GNYE)	3:1	30	319-00157
TREDUX-3/1	3.0	1.0	0.55	1.0 m	20 pcs.	Black (BK)	3:1	30	319-00300
	3.0	1.0	0.55	1.0 m	20 pcs.	Green-Yellow (GNYE)	3:1	30	319-00307
TREDUX-6/2	6.0	2.0	0.65	1.0 m	15 pcs.	Black (BK)	3:1	30	319-00600
	6.0	2.0	0.65	1.0 m	15 pcs.	Green-Yellow (GNYE)	3:1	30	319-00607
TREDUX-12/4	12.0	4.0	0.80	1.0 m	10 pcs.	Black (BK)	3:1	30	319-01200
	12.0	4.0	0.80	1.0 m	10 pcs.	Green-Yellow (GNYE)	3:1	30	319-01207
TREDUX-24/8	24.0	8.0	1.20	1.0 m	5 pcs.	Black (BK)	3:1	30	319-02400
	24.0	8.0	1.20	1.0 m	5 pcs.	Green-Yellow (GNYE)	3:1	30	319-02407
TREDUX-38.1/19.1	38.1	19.1	1.02	1.0 m	6 pcs.	Black (BK)	2:1	30	319-03800
	38.1	19.1	1.02	1.0 m	6 pcs.	Green-Yellow (GNYE)	2:1	30	319-03807
TREDUX-50.8/25.4	50.8	25.4	1.14	1.0 m	6 pcs.	Black (BK)	2:1	30	319-05100
TREDUX-76.2/38.1	76.2	38.1	1.27	1.0 m	3 pcs.	Black (BK)	2:1	30	319-07600
TREDUX-101.6/50.8	101.6	50.8	1.40	1.0 m	2 pcs.	Black (BK)	2:1	30	319-10200

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.



For product specific approvals and specifications please refer to the Appendix.



Add items to your watchlist!
www.HT.click/9-231