

Heat shrinkable cable repair sleeves

RMS

RMS wrap-around sleeves are closed with a steel channel. The sleeve is adhesive lined and will effectively seal the cable after shrinkage. RMS sleeves provide fast, watertight and reliable insulation.

Features and benefits

- Fast, moisture proof and permanent repair of cable jackets
- Only 6 sizes for a wide range of cable diameters: from 15 mm up to 160 mm
- Available in 4 standard lengths and also in custom lengths on request
- Each RMS kit is ready for use and comes with instruction sheet, abrasive strip and cleaning sachet
- The metal closure is made of 316 stainless steel for high overall corrosion resistance
- Weather resistant and halogen free
- TCP (thermo chromatic paint) spots indicate the sleeve has been sufficiently heated


MATERIAL	Polyolefin, chemically cross-linked (PO-X)
Shrink Ratio	up to 4.5:1
Operating Temperature	-40 °C to +120 °C
Min. Shrink Temperature	+110 °C
Softening Point Adhesive	+105 °C
Longitudinal Change After Shrinkage	-10 % max.
Dielectric Strength	30 kV/mm
Flammability	not flame retardant



RMS wrap-around sleeves for rapid and secure cable repair.



RMS: Repair sleeve, steel closure, abrasive strip, cleaning sachet, instruction sheet.

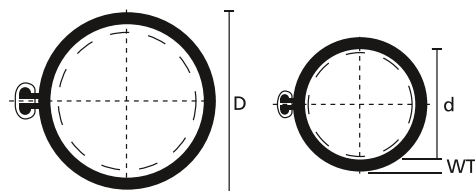

Cable Repair Sleeve RMS with adhesive

TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Suitable for Cable Ø from/to	Length (L)	Colour	Tools	Article-No.
RMS 43-10	43.0	10.0	2.30	15 - 35	250.0	Black (BK)	30;32	450-20000
	43.0	10.0	2.30	15 - 35	500.0	Black (BK)	30;32	450-20001
	43.0	10.0	2.30	15 - 35	750.0	Black (BK)	30;32	450-20004
	43.0	10.0	2.30	15 - 35	1,000.0	Black (BK)	30;32	450-20002
RMS 52-15	52.0	15.0	2.30	20 - 45	250.0	Black (BK)	30;32	450-20010
	52.0	15.0	2.30	20 - 45	500.0	Black (BK)	30;32	450-20011
	52.0	15.0	2.30	20 - 45	750.0	Black (BK)	30;32	450-20014
	52.0	15.0	2.30	20 - 45	1,000.0	Black (BK)	30;32	450-20012
RMS 76-22	76.0	22.0	2.50	28 - 65	500.0	Black (BK)	30;32	450-20021
	76.0	22.0	2.50	28 - 65	750.0	Black (BK)	30;32	450-20024
	76.0	22.0	2.50	28 - 65	1,000.0	Black (BK)	30;32	450-20022
RMS 100-30	100.0	30.0	2.54	35 - 85	500.0	Black (BK)	30;32	450-20030
	100.0	30.0	2.54	35 - 85	1,000.0	Black (BK)	30;32	450-20031
RMS 139-38	139.0	38.0	2.77	45 - 120	1,000.0	Black (BK)	30;32	450-20041
RMS 185-55	185.0	55.0	2.74	65 - 160	1,000.0	Black (BK)	30;32	450-20050

All dimensions in mm. Subject to technical changes. Minimum Order Quantity (MOQ) may differ from package content.

