



4-Way Outlet Shapes, VG style

Helashrink 400 Series

Features and benefits


- All outlets clearly marked to aid orientation during installation
- Cable strain relief and mechanical protection at harness transition points




403-1 supplied / fully recovered.



For Material / Adhesive information please refer to page 274, 275.

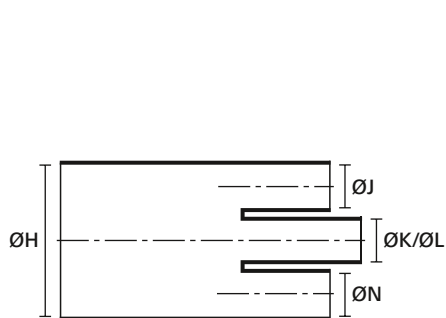

a: Expanded form (supplied)

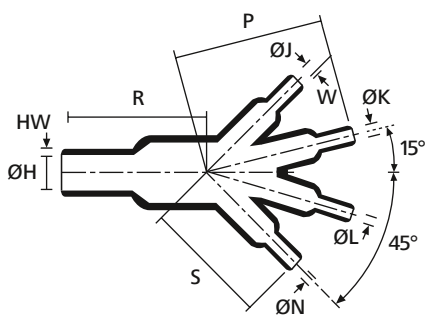

b: Fully recovered form (after heating)

TYPE	ØH min. a	ØH max. b	ØJ/K/L/N min. a	ØJ/K/L/N max. b	P ± 10 %	R ± 10 %	HW ± 20 %	W ± 10 %	S nom.	Designation as per VG-Norm	Article-No.
411-1-G	19.0	10.0	9.5	5.5	-	35.6	2.0	1.0	32.0	VG 95343 T08 E 002 A	404-11180
403-1-G	27.0	13.0	13.0	7.0	102.0	49.0	2.5	1.5	45.0	VG 95343 T08 E 004 A	404-03180
413-1-G	38.5	19.0	19.0	10.0	-	72.0	3.0	2.0	65.0	VG 95343 T08 E 005 A	404-13180

All dimensions in mm. Subject to technical changes. For these moulded shapes a wide range of material / adhesive combinations are available. Please refer to the Moulded Shapes Catalogue.



For product specific approvals and specifications please refer to the Appendix.



Add items to your watchlist!

www.HT.click/9-289

