

### PA Flame-retardant Spiral Binding

#### SBPAV0


Due to its excellent flame protection properties, SBPAV0 spiral binding is particularly suitable for the rail and aviation industries as well as public buildings.

#### Features and benefits

- Organises and protects cables and hoses
- Self-extinguishing according to UL94 V0
- Very good protection against abrasion
- Suitable for retro-fitting
- Cables branch out at any point
- Wide range of diameters



Spiral binding SBPAV0.

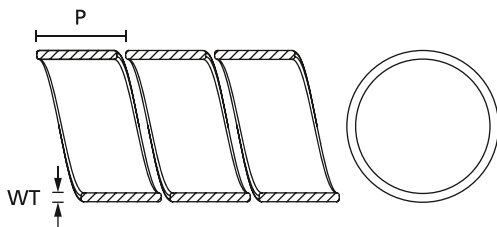

Spiral binding

<b>MATERIAL</b>	Polyamide 6 V0 (PA6V0)
<b>Operating Temperature</b>	-60 °C to +95 °C, intermittent +130 °C
<b>Flammability</b>	UL 94 V0
<b>EN 45545-2 Classification</b>	R22 HL2, R23 HL2



TYPE	Nominal Ø	Wall (WT)	Pitch (P)	Bundle Ø min.	Bundle Ø max.	Colour	Reel Length	Article-No.
SBPAV01.5	1.5	0.4	6.0	1.6	8	Black (BK)	30 m	161-44000
SBPAV04	4	0.6	7.8	5	20	Black (BK)	30 m	161-44100
SBPAV06	6	0.8	10.0	7.5	40.0	Black (BK)	30 m	161-44150
SBPAV09	9	1.0	12.5	10	100	Black (BK)	30 m	161-44200
SBPAV016	16	1.2	16.0	20	150	Black (BK)	30 m	161-44300

All dimensions in mm. Subject to technical changes.  
Minimum Order Quantity (MOQ) may differ from package content.

**EN 45545-2**

For product specific approvals and specifications please refer to the Appendix.



Add items to your watchlist!

[www.HT.click/9-345](http://www.HT.click/9-345)

