

Midi Horns and Sirens / Electronic Siren 123
Electr. Siren WM alternating 12VDC BK



Part No.: **123.100.54**



MECHANICAL DATA

| | |
|------------------------------|-----------------------------|
| Length | 67 mm |
| Width | 54 mm |
| Height | 67 mm |
| Diameter | 54 mm |
| Materials | ABS |
| Housing colour | Black |
| Protection category | IP54 |
| Connection | Cable |
| cross-sectional area maximum | 0,50mm ² / 20AWG |
| Type of fixing | Wall mounting |
| Working temperature minimum | -30°C |
| Working temperature maximum | +70°C |
| Weight with packaging | 89 g |
| Product weight | 71 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------|
| Operating voltage | 12V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 12 VDC |
| Rated operational current | 100 mA |
| Rated inrush current | 3.000 mA |
| Protection class | Protection class 3 |
| Pollution degree | 3 |
| Request to external PSU | SELV/PELV |

ACOUSTIC DATA

| | |
|-----------------------------|------------------|
| Volume (max) at 1m distance | 105,0 dB (A) |
| Acoustic signal image | Alternating tone |
| Acoustic service life | 1,000 h minimum |

APPROVAL DATA

| | |
|------------------------------|-----|
| Conforms with CE | Yes |
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | No |
| Conforms with FCC | No |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Midi Horns and Sirens / Electronic Siren 123

Electr. Siren WM alternating 12VDC BK

| | |
|-------------------------------|-----------------------|
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

DRAWING

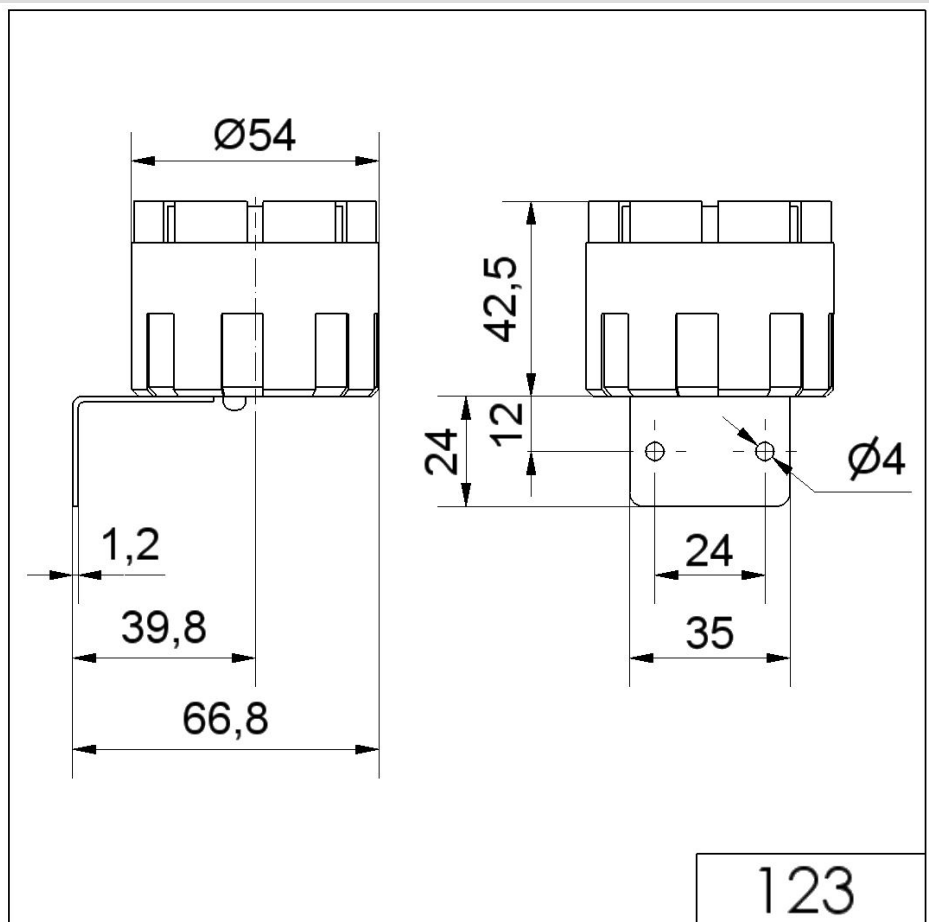

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.