

Article-No: 86240621

High Bay




QUADRONIUS DALI 77cm ESG 2x97W 065° 30000lm TWwithout class I

QUADRONIUS DALI 0768mm ESG 2x97W 065° 30000lm, 4.000K, class I, without TW, RAL 9010. LED spotlight with toughened safety glass cover, die-cast aluminum housing and integrated converter. With age-resistant silicone seals, easy to install and expandable as XLS series. Flexible mounting options and optional control via Bluetooth or DALI.

- Configurable highbay luminaire (light color, beam characteristics and resistance)
- available for high and low temperatures (-40 to +75° degrees), swimming pools, food industry & unprotected outdoor areas
- REBUILD product: new components, old spotlight
- Ideal for logistics, high-bay warehouses, industry, cold stores or agriculture
- IFS certified & splinter protection
- single or double flame
- CASAMBI Dali Master, control via CASAMBI module/app, compatible with other DALI luminaires as slaves

GTIN 4018098298595

Statistical product number 94054239

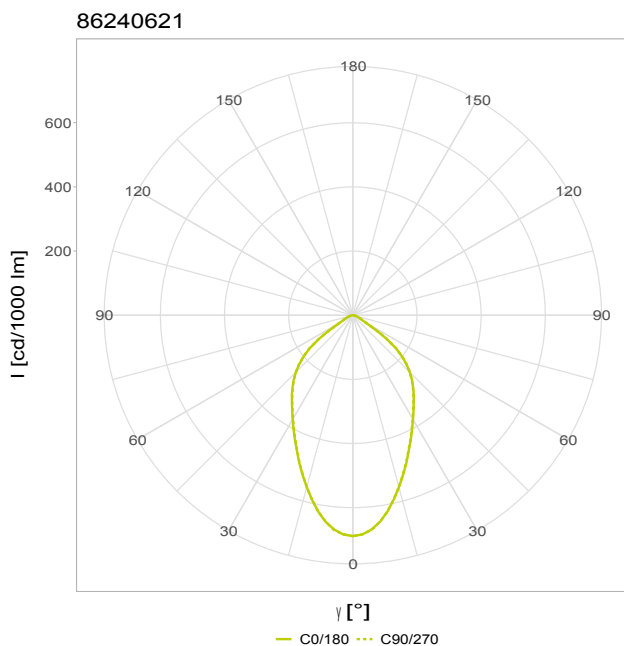

DIMENSIONS AND WEIGHTS

Length	768 mm
Width	324 mm
Height	157 mm
Net weight	14,00 kg

OUTPUT

Luminous flux	30000 lm
Systempower	194 W
Efficacy	155 lm/W
Energy efficiency class of the light source	E

ASSEMBLY AND MAINTENANCE

Optional mounting type	Ceiling, horizontal Wall, vertical wall
Standard mounting	Pendulum mounting

LIGHT SOURCE

Luminaire type	LED
Number of light sources LED rows lamps	2
Colour temperature	4000 K
Colour rendering index	>80
Number of LEDs	512
Standard Deviation of Colour Matching (SDCM)	3
Control gear exchangeable	yes, by qualified person
Light source exchangeable	yes, by qualified person

LIGHTING ENGINEERING

Light distributor	Refractor lens
Light distribution angle	65 °
Light distribution	medium beam
Glare limitation UGR 4H 8H C0 C90	25 / 25

CAPACITY

outdoor area	Protected outdoor area*
Rebuildable	false
IK-Impact resistance	IK08
Protection class (IP)	IP65
Use in animal husbandry	with limitation
Vandalism protection	false
Warranty	5 Years
Life expectancy B50 at 25° in hours (h)	
L80/B50 25°C	80000
L70/B50 25°C	100000
Life expectancy B10 at 25° in hours (h)	
L80/B10 25°C	80000
L70/B10 25°C	100000
Life expectancy B50 at 45° in hours (h)	
L80/B50 45°C	55000
L70/B50 45°C	86000
max. lowest temperature	-40 °C
max. highest temperature	45 °C

MATERIAL

Cover material	single-pane safety glass
Housing material	Aluminium
Housing colour	White RAL 9010

TECHNICAL DATA

Dimming type	Dimming DALI Dimming DALI-2
Filament test	960 °C
Protection class	class I
Circuit Breaker B10A	4 Luminaires
Circuit Breaker B16A	7 Luminaires
Circuit Breaker C10A	7 Luminaires
Circuit Breaker C16A	11 Luminaires
Voltage spike protection U (L-PE)	10,0 kV
Voltage spike protection U (L-N)	6,0 kV
Through-wiring mm²	without
D-marking	true
Voltage type acc. ETIM	AC/DC
IFS suitable	false
Emergency light suitability of the luminaire	No
Rated voltage	220–240V 0/50/60 Hz

PACKAGING

VPE 1	
Unit	Carton
Content quantity	1 Piece
Length	0,81 m
Width	0,35 m
Height	0,23 m
Weight	16,50 kg
VPE 2	
Unit	Pallet
Content quantity	15 Piece
Length	1,20 m
Width	0,80 m
Height	1,30 m
Weight	267,50 kg

FURTHER PRODUCT INFORMATION

REACH-Info	false
REACH list date	2024-01-23
Market labelling	CE
Product labelling	RoHS, WEEE

Accessories (optional)

Article-No:	Designation
06011071	Wall and ceiling mounting bracket Quadronius, coated RAL 9010
06011081	Ceiling mounting bracket Quadronius two angle, coated RAL 9010
06012171	Wall and ceiling mounting bracket Quadronius POOL, coated RAL 9010, V4A
06012181	Ceiling mounting bracket Quadronius POOL two angle, coated RAL 9010, V4A

* Protected outdoor area:

a canopy protects the luminaire of direct solar radiation. It is to be ensured that for mounting beneath the edge, the luminaire does not withstand heavy rainfall. Typically a height difference of 0,5 times the roof overhang compared to the luminaire should not be exceeded.

The right of error and later technical developments is reserved. 14.05.2025

Values may be extrapolated differently from TM21.

