


Resisto SylSmart  
Resisto 1200 IP65 2800lm 840 SSA  
0010230



Product features

- Resisto, integrated LED weatherproof luminaire, with UV stabilized flat diffuser designed to achieve uniform lit appearance, optimise light output and to reduce glare. 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing and diffuser - no yellow discolouration over time. 2800lm; 20W; 140lm/W; 4000K; SDCM<5; CRI80; IP66; IK08 (sensor IK03); Class I; 69,000hrs (L80B20) lifespan; 1288mm x 87mm x 80mm; D-mark; SylSmart Connected Building enabled.

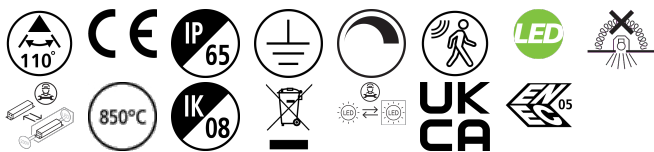


PRODUCT OVERVIEW

Product name	Resisto 1200 IP65 2800lm 840 SSA
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Suspended, Wall surface mounted
General application	Logistics & Industry
ETIM Class	EC002892
Warranty	5 years
Useful luminous flux (Fuse)	2800
Fixture luminous flux (lm)	2800
Luminaire efficacy (lm/W)	140
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSA
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288102306

Resisto SylSmart  
Resisto 1200 IP65 2800lm 840 SSA  
0010230

PHOTOMETRY

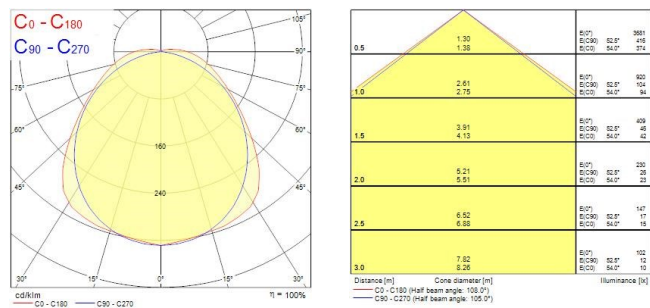

TECHNICAL DRAWINGS

