


# START eco Bollard L-Shape L IP65 620lm 830 BLK

Item No: 0047952


**SYLVANIA**

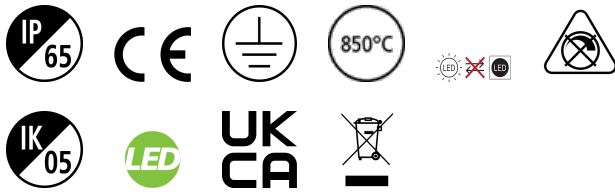

Exterior integrated LED bollard, Decorative bollard with a sleek design, Metal - Aluminium housing - RAL9005, 620LM, 8W, 78lm/W, 3000K, Electronic driver, Driver Current: 60mA, CRI80, IP65, IK05, 30,000hrs (L70), (HxWxD) 800x160x90mm, 5 step MacAdam ellipse, 2.1 kg, RAL 9005, Class 1, 220-240V, energy class: A++, A+, A

## Technical Assets


### Dimensions (mm)

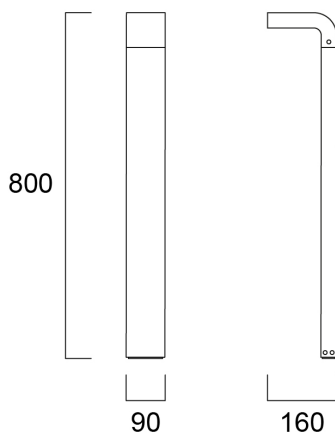

### Photometrics

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	1.22 1.13	E171 1113 E1C90 142 E1C90 169
1.0	2.44 2.25	E171 278 E1C90 35 E1C90 41
1.5	3.67 3.38	E171 124 E1C90 15 E1C90 18
2.0	4.89 4.51	E171 70 E1C90 9 E1C90 10
2.5	6.11 5.63	E171 45 E1C90 6 E1C90 7
3.0	7.33 6.76	E171 31 E1C90 4 E1C90 5

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 — C0 - C180 (Half beam angle: 98.8°)  
 — C90 - C270 (Half beam angle: 101.4°)



# START eco Bollard L-Shape L IP65 620lm 830 BLK

Item No: 0047952

**SYLVANIA**

## General data

Product name	START eco Bollard L-Shape L IP65 620lm 830 BLK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
General application	Residential & Consumer
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000301
Warranty	3 years

## Optical data

Useful luminous flux (Φuse)	620
Fixture luminous flux (lm)	620
Luminaire efficacy (lm/W)	78
Correlated colour temperature (k)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	92
Photobiological Risk Group	RG1

## Electrical data

Total power consumption (W)	8
Current (A)	0.064
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.57
THD (at 230 V, 50 Hz, full load, at 100% dimming level) ≤ xx.x %	120.0
Electrical protection	Class I
Dimmable	No
Dimming method	N/A
Drive current (mA)	60
Inrush Current (A)	10
Inrush Duration (µs)	250
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	60
Max. products per 13A C Breaker	80
Max. products per 16A C Breaker	100
Max. products per 20A C Breaker	120

## Lifetime data

Lifespan L70 B50 | 30000

## Physical data

Housing colour	RAL 9005 - Jet black
IP rating	IP65
IK rating	IK05
Diffuser finish	Transparent
Diffuser material	Glass
Nominal Product Length (mm)	90
Nominal Product Width (mm)	160
Nominal Product Height (mm)	800
Weight (kg)	2.15

# START eco Bollard L-Shape L IP65 620lm 830 BLK

Item No: 0047952

**SYLVANIA**

## Packaging

Product EAN number	5410288479521
Packaging single length / height (cm)	53.5
Packaging single width (cm)	19.5
Packaging single depth (cm)	12.5
DUN14 (inner)	15410288479528
Units per outer package	3
Packaging outer length / height (cm)	21.5
Packaging outer width (cm)	85.5
Packaging outer depth (cm)	39.2

## Safety data

Glow Wire Test (°C)	850
Optimal operating condition (°C)	-20-45