

START DOWNLIGHT 205 IP44 SSC
START DOWNLIGHT 205 IP54 SSC01 2100LM 830 DALI
0030375



Product features

- Ceiling recessed LED downlight IP54 (from the front), with only 60mm product depth and 205mm cutout. Ideal replacement for 1x42W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 20W, 3000K, Driver Current: 600mA, CRI80, 74° beam angle, IP54 from the front, IK07, (HxW) 60x205mm, Class 2, 220-240V, SylSmart Standalone Scene enabled. Meets TP(a) requirements.




PRODUCT OVERVIEW

Product name	START DOWNLIGHT 205 IP54 SSC01 2100LM 830 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Retail
ETIM Class	EC001744
Warranty	5 years
Useful luminous flux (Fuse)	2100
Fixture luminous flux (lm)	2100
Luminous flux (lm)	2100
Luminaire efficacy (lm/W)	105
LOR (%)	100
Correlated colour temperature (k)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSC
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP54/20
IK rating	IK07
Product EAN number	5410288303758

START DOWNLIGHT 205 IP44 SSC
START DOWNLIGHT 205 IP54 SSC01 2100LM 830 DALI
0030375

PHOTOMETRY

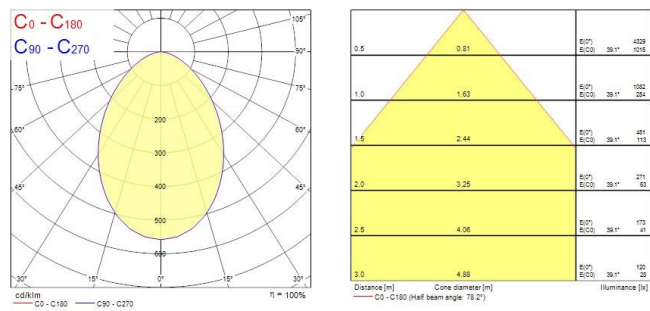

TECHNICAL DRAWINGS

