





### Features

- Sleek and compact design Low energy consumption Instant light at the flick of switch No glare thanks to frosted diffuser 15,000 hours rated lamp life Good colour rendering - CRI80 Non-dimmable 3 years warranty The perfect lamp for cabinet lighting in kitchens, bedrooms and for displays and showcases

### Product Overview

Product name	ToLEDo MicroLynx V2 650LM 840 SL
Technology	LED
Watt (Rated) (W)	6.5
Cap/Base	GX53
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4741149
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Wattage (W)	6.5
Power consumption (W)	6.5
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288296975
Warranty	3 years
Useful luminous flux (#use)	650

## Technical drawings

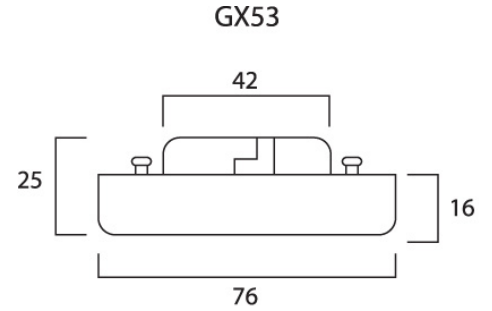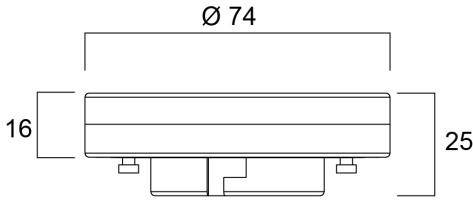

## Data table

### GENERAL DATA

Product name	ToLEDo MicroLynx V2 650LM 840 SL
Technology	LED
Watt (Rated) (W)	6.5
Cap/Base	GX53
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741149
Warranty	3 years

### OPTICAL DATA

Useful luminous flux (#use)	650
-----------------------------	-----

## ToLEDo MicroLynx V2 650LM 840 SL 0029697

Luminous flux (Rated) (lm)	650
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

### ELECTRICAL DATA

Power consumption (W)	6.5
Wattage (W)	6.5
Equivalent watt (W)	50
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	No
Inrush Current (A)	2.8
Inrush Duration (µs)	380
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	57
Max. products per 16A B Breaker	29

### LIFETIME DATA

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

### PHYSICAL DATA

Nominal Product Length (mm)	75
Nominal Product Diameter (mm)	25

ToLEDo MicroLynx V2 650LM 840 SL  
0029697

Weight (kg)	0.048
-------------	-------

## PACKAGING

Product EAN number	5410288296975
Packaging single length / height (cm)	7.6
Packaging single width (cm)	2.7
Packaging single depth (cm)	7.6
DUN14 (inner)	15410288296972
Units per outer package	6
Packaging outer length / height (cm)	16.0
Packaging outer width (cm)	9.0
Packaging outer depth (cm)	8.4

## SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

# SYLVANIA

ToLEDo MicroLynx V2 650LM 840 SL  
0029697

## Energy label



0029697



7  
kWh/1000h



2019/2015



0029697



7  
kWh/1000h



2019/2015

Light your world