


START Panel IP44 UGR19 600x600

ST Panel UGR19 600x600 HE IP44 DALI 4300 840
0042639



Product features

- START Panel IP44 is a range of backlit LED panels used in recessed ceilings. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. Nominal size 600x600mm, 4300Lm; 34W; 126Lm/W; Average lifespan: 100.000Hrs; 4000K; CRI 80; Glare control <19; IK03; IP44 (from the front); SDCM<3; Class II; DALI dimmable.

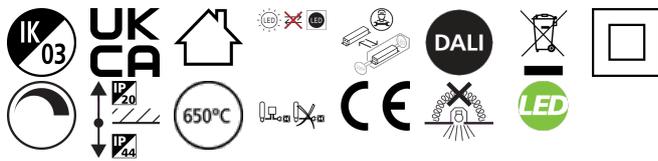



PRODUCT OVERVIEW

Product name	ST Panel UGR19 600x600 HE IP44 DALI 4300 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4278345
Warranty	5 years
Useful luminous flux (Fuse)	4300
Fixture luminous flux (lm)	4300
Luminaire efficacy (lm/W)	126
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	34
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288426396

PHOTOMETRY

START Panel IP44 UGR19 600x600

ST Panel UGR19 600x600 HE IP44 DALI 4300 840
0042639



TECHNICAL DRAWINGS

