

START DOWNLIGHT 205 IP44


START Downlight 205 IP44 2150Lm 840 DALI

0030337



Product features

- Ceiling recessed LED downlight IP44 (from the front), with only 60mm product depth and 205mm cutout. Supplied with DALI Tridonic push dim driver with loop in - out option (28000671). Ideal replacement for 1x42W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Die-cast aluminium body, 20W, 4000K, Driver Current: 600mA, CRI80, 74° beam angle, IP44 from the front, IK07, (HxW) 60x205mm, Class 2, 220-240V. Meets TP(a) requirements.

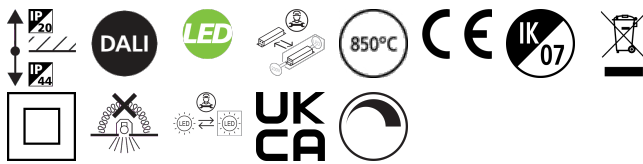


PRODUCT OVERVIEW

Product name	START Downlight 205 IP44 2150Lm 840 DALI
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278165
Warranty	5 years
Useful luminous flux (Fuse)	2150
Fixture luminous flux (lm)	2150
Luminous flux (lm)	2150
Luminaire efficacy (lm/W)	108
LOR (%)	100
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	80
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	DALI, DALI-2, Switch-dim (mains-rated)
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9010 - Pure white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303376

START DOWNLIGHT 205 IP44
START Downlight 205 IP44 2150Lm 840 DALI
0030337

PHOTOMETRY

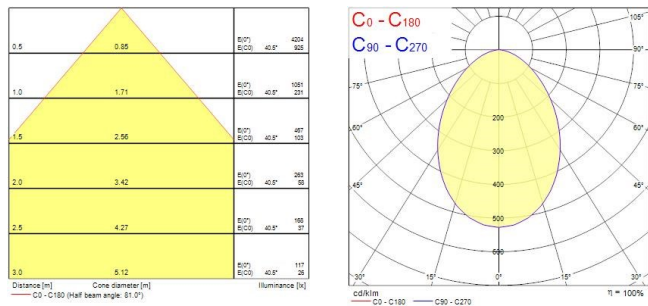

TECHNICAL DRAWINGS

