

## START eco Bollard L-Shape L IP65 620lm 830 BLK 0047952



### Features

- Exterior integrated LED bollard, Decorative bollard with a sleek design, Metal - Aluminium housing - RAL9005, 620LM, 8W, 78lm/W, 3000K, Electronic driver, Driver Current: 60mA, CRI80, IP65, IK05, 30,000hrs (L70), (HxWxD) 800x160x90mm, 5 step MacAdam ellipse, 2.1 kg, RAL 9005, Class 1, 220-240V, energy class: A++, A+, A


### Product Overview

|                                   |  |
|-----------------------------------|--|
| Product name                      | START eco Bollard L-Shape L IP65 620lm 830 BLK |
| Technology                        | LED  |
| Cap/Base                          | N/A  |
| Housing                           | Aluminium                                      |
| General application               | Residential & Consumer                         |
| ETIM Class                        | EC000301                                       |
| Fixture luminous flux (lm)        | 620  |
| Luminaire efficacy (lm/W)         | 78   |
| Correlated colour temperature (k) | 3000   |
| Light colour                      | Warm White                                     |
| CRI (Ra)                          | 80   |
| Colour Variation Initial (SDCM)   | 6  |
| Beam Angle (°)                    | 92   |
| Photobiological Risk Group        | RG1  |
| Total power consumption (W)       | 8  |
| Electrical protection             | Class I  |
| LED Flickering Rate               | Low (6% - 20%)                                 |
| Housing colour                    | RAL9005  |

## START eco Bollard L-Shape L IP65 620lm 830 BLK 0047952

|                             |               |
|-----------------------------|---------------|
| IP rating                   | IP65          |
| IK rating                   | IK05          |
| Product EAN number          | 5410288479521 |
| Warranty                    | 3 years       |
| Dimming method              | N/A           |
| Colour Code                 | 830           |
| Useful luminous flux (#use) | 620           |

### Photometry

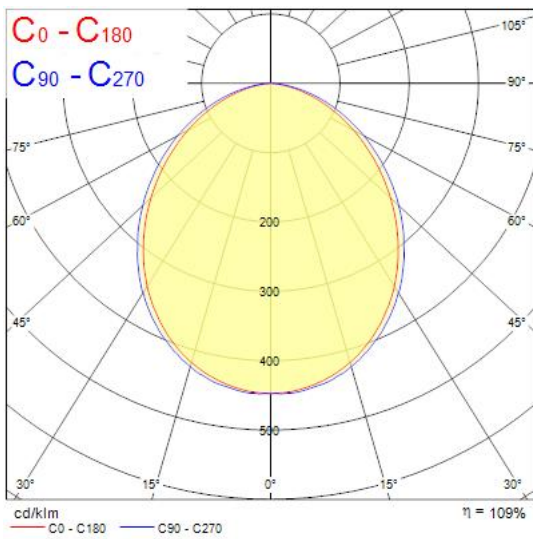

### Technical drawings

