
Walraven starQuick® Clamp (Grey)

(C0505)

for securing conduits and pipes to walls, floors, or ceilings



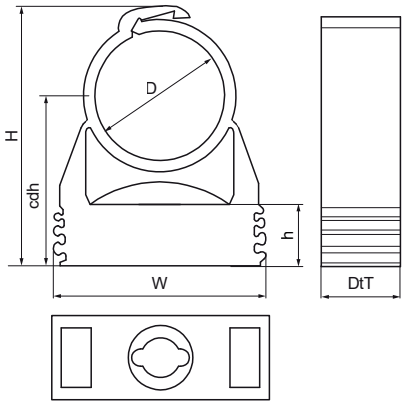

Features & benefits

- one-part clamp
- clamp closes by applying pressure to the pipe
- for outdoor use and installations in swimming pool environments, chemical factories, zinc factories, etc.
- due to a patented profile it is possible to tack several clamps to each other
- material: modified PA6 (polyamide), grey (according to RAL 7035)
- resistant to UV, ageing, oil and petrol
- no corrosion, recyclable, halogen free
- temperature resistance from approx. -40 °C to approx. +90 °C (constant); short to approx. +130 °C

Product Number	Outside Pipe Diameter	Fixing Hole	Total Height	Total Width	Total Depth	Clamp Center Distance Height	Height	Connection Thread	Maximum Allowed Load Faz	Breaking Load Fbz
Reference Letter	*D*	*FH*	*H*	*W*	*DtT*	*cdh*	*h*	*G*	*Fa,z*	*Fb,z*
Unit description	*mm*	*mm*	*mm*	*mm*	*mm*	*mm*	*mm*		*N*	*N*
0854010	10 - 12	8	34	29	17	24	10.6	None	170	500
0854012	12 - 14	8	36	29	17	25	10.6	None	180	550
0854015	14 - 16	8	36	29	17	25	10.6	None	200	600
0854018	16 - 20	8	40	29	17	27	10.6	None	230	700
0854022	20 - 23	8	43	29	17	28	10.6	None	270	800
0854028	24 - 28	8	50	40	18	32	10.6	None	280	850
0854031	28 - 32	8	55	40	17	36	10.6	None	300	900
0854035	32 - 35	8	59	43	17	37	10.6	None	330	1,000
0854038	35 - 40	8	68	47	17	44	12.1	None	330	1,000
0854042	40 - 44	8	70	52	17	44	12.1	None	330	1,000
0854050	44 - 50	8	79	57	17	50	12.1	None	330	1,000
0854054	48 - 55	8	82	63	17	50	12.1	None	330	1,000
0854063	59 - 65	8	95	74	20	57	12.1	None	500	1,500