



Sample image

Datasheet

Article number: 70007345
Designation: CA4.A213.E
Description: Schalter
Contact development: A213
Face plate engraving: F071
Type of mounting: E

Type Size: S00
Classification Contact: Rigid contact bridge
Classification Contact Mat: Silver
Classification Terminal: Screw terminal

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage U_i						
		Voltage (V) AC / DC				
		440 AC / DC				
Rated impulse withstand voltage U_{imp}						
Voltage (kV)	Overvoltage category	Pollution degree	Supply system	Function		
4 III		3	Valid for lines with grounded common neutral termination	switch		
Rated uninterrupted current I_u/I_{th}						
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements			
10	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C			
Conventional enclosed thermal current I_{the}						
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	Additional requirements	No. of stages (from - to)	Mounting	Mounting size
10	35	40	Ambient temperature +35°C during 24 hours with peaks up to +40°C	--	--	--
Rated operational current I_e						
Utilization category				Voltage (V)	Current (A)	
AC-15				220 - 240	2,50	
AC-15				380 - 440	1,50	
AC-20A				440	10	
AC-21A				440	10	
AC-22A				220 - 440	10	
Rated operational power						
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)		
AC-2	220 - 240	3	3	2,50		
AC-2	380 - 440	3	3	4,50		
AC-3	220 - 240	3	3	1,50		
AC-3	380 - 440	3	3	2,20		
AC-3	110 - 120	1	2	0,30		
AC-3	220 - 240	1	2	0,55		
AC-3	380 - 440	1	2	0,75		
AC-4	220 - 240	3	3	0,37		
AC-4	380 - 440	3	3	0,55		
AC-4	110 - 120	1	2	0,15		
AC-4	220 - 240	1	2	0,25		
AC-4	380 - 440	1	2	0,50		
AC-23A	220 - 240	3	3	1,80		
AC-23A	380 - 440	3	3	3		
AC-23A	110 - 120	1	2	0,37		
AC-23A	220 - 240	1	2	0,75		
AC-23A	380 - 440	1	2	1,10		
Max Fuse Rating IEC						
Fuse characteristic				No. of Fuses	Current (A)	
gG				1	10	
Tested AC and DC values						
Utilization category / Time constant	No. of contacts in series	Off or change-over switch	Voltage (V)	AC / DC	Current (A)	
DC-13	1	ON - OFF	24	DC	0,80	
DC-13	1	ON - OFF	48	DC	0,50	
DC-13	1	ON - OFF	60	DC	0,20	
DC-13	2	ON - OFF	48	DC	0,80	
DC-13	2	ON - OFF	96	DC	0,50	
DC-13	2	ON - OFF	120	DC	0,20	
DC-13	3	ON - OFF	110	DC	1	

Tested AC and DC values					
Utilization category / Time constant	No. of contacts in series	Off or change-over switch	Voltage (V)	AC / DC	Current (A)
DC-21A	1	ON - OFF	24	DC	10
DC-21A	1	ON - OFF	48	DC	6
DC-21A	1	ON - OFF	60	DC	5
DC-21A	1	ON - OFF	110	DC	4
DC-21A	1	ON - OFF	220	DC	0,80
DC-21A	2	ON - OFF	48	DC	10
DC-21A	2	ON - OFF	96	DC	6
DC-21A	2	ON - OFF	120	DC	5
DC-21A	2	ON - OFF	220	DC	4
DC-21A	2	ON - OFF	440	DC	0,80
DC-21A	3	ON - OFF	72	DC	10
DC-21A	3	ON - OFF	144	DC	6
DC-21A	3	ON - OFF	180	DC	5
DC-21A	3	ON - OFF	330	DC	4
DC-21A	3	ON - OFF	660	DC	0,80
DC-21A	4	ON - OFF	96	DC	10
DC-21A	4	ON - OFF	192	DC	6
DC-21A	4	ON - OFF	240	DC	5
DC-21A	4	ON - OFF	440	DC	4
DC-21A	5	ON - OFF	120	DC	10
DC-21A	5	ON - OFF	240	DC	6
DC-21A	5	ON - OFF	300	DC	5
DC-21A	5	ON - OFF	550	DC	4
DC-21A	6	ON - OFF	144	DC	10
DC-21A	6	ON - OFF	288	DC	6
DC-21A	6	ON - OFF	360	DC	5
DC-21A	6	ON - OFF	660	DC	4
DC-21A	8	ON - OFF	192	DC	10
DC-21A	8	ON - OFF	384	DC	6
DC-21A	8	ON - OFF	480	DC	5
DC-22A	1	ON - OFF	24	DC	8
DC-22A	1	ON - OFF	48	DC	5
DC-22A	1	ON - OFF	60	DC	4
DC-22A	1	ON - OFF	110	DC	1,50
DC-22A	1	ON - OFF	220	DC	0,30
DC-22A	2	ON - OFF	48	DC	8
DC-22A	2	ON - OFF	96	DC	5
DC-22A	2	ON - OFF	120	DC	4
DC-22A	2	ON - OFF	220	DC	1,50
DC-22A	2	ON - OFF	440	DC	0,30
DC-22A	3	ON - OFF	72	DC	8
DC-22A	3	ON - OFF	144	DC	5
DC-22A	3	ON - OFF	180	DC	4
DC-22A	3	ON - OFF	330	DC	1,50
DC-22A	3	ON - OFF	660	DC	0,30
DC-22A	4	ON - OFF	96	DC	8
DC-22A	4	ON - OFF	192	DC	5
DC-22A	4	ON - OFF	240	DC	4
DC-22A	4	ON - OFF	440	DC	1,50
DC-22A	5	ON - OFF	120	DC	8
DC-22A	5	ON - OFF	240	DC	5
DC-22A	5	ON - OFF	300	DC	4
DC-22A	5	ON - OFF	550	DC	1,50
DC-22A	6	ON - OFF	144	DC	8
DC-22A	6	ON - OFF	288	DC	5
DC-22A	6	ON - OFF	360	DC	4
DC-22A	6	ON - OFF	660	DC	1,50
DC-22A	8	ON - OFF	192	DC	8
DC-22A	8	ON - OFF	384	DC	5
DC-22A	8	ON - OFF	480	DC	4
DC-23A	1	ON - OFF	24	DC	7
DC-23A	1	ON - OFF	48	DC	4
DC-23A	1	ON - OFF	60	DC	3,50
DC-23A	1	ON - OFF	110	DC	1
DC-23A	1	ON - OFF	220	DC	0,20
DC-23A	2	ON - OFF	48	DC	7
DC-23A	2	ON - OFF	96	DC	4
DC-23A	2	ON - OFF	120	DC	3,50
DC-23A	2	ON - OFF	220	DC	1
DC-23A	2	ON - OFF	440	DC	0,20
DC-23A	3	ON - OFF	72	DC	7
DC-23A	3	ON - OFF	144	DC	4
DC-23A	3	ON - OFF	180	DC	3,50
DC-23A	3	ON - OFF	330	DC	1
DC-23A	3	ON - OFF	660	DC	0,20
DC-23A	4	ON - OFF	96	DC	7


Tested AC and DC values					
<i>Utilization category / Time constant</i>	<i>No. of contacts in series</i>	<i>Off or change-over switch</i>	<i>Voltage (V) AC / DC</i>		<i>Current (A)</i>
DC-23A	4	ON - OFF	192	DC	4
DC-23A	4	ON - OFF	240	DC	3,50
DC-23A	4	ON - OFF	440	DC	1
DC-23A	5	ON - OFF	120	DC	7
DC-23A	5	ON - OFF	240	DC	4
DC-23A	5	ON - OFF	300	DC	3,50
DC-23A	5	ON - OFF	550	DC	1
DC-23A	6	ON - OFF	144	DC	7
DC-23A	6	ON - OFF	288	DC	4
DC-23A	6	ON - OFF	360	DC	3,50
DC-23A	6	ON - OFF	660	DC	1
DC-23A	8	ON - OFF	192	DC	7
DC-23A	8	ON - OFF	384	DC	4
DC-23A	8	ON - OFF	480	DC	3,50
Rated conditional short-circuit current					
	<i>Current (kA)</i>	<i>Text</i>	<i>cut-off current I_c (kA)</i>		<i>Durchlassenergie I²t (kA²s)</i>
	3	--	0,82		0,19
Rated breaking capacity					
	<i>Voltage (V)</i>		<i>Current (A)</i>	<i>Utilization category / UL (DOL)</i>	
	220 - 240		50	--	
	380 - 440		50	--	
Rated short-circuit making capacity I_{cm}					
					<i>Current (A)</i>
					200
UL60947-4-1 , UL508					
Nominal Voltage					
	<i>Voltage (V) AC / DC</i>				
	300 AC				
Rated insulation voltage U_i					
	<i>Voltage (V) AC / DC</i>				
	300 AC				
Rated thermal current					
	<i>Current (A)</i>	<i>Ambient temperature (°C)</i>		<i>Additional Text</i>	
	10	0 - 40		--	
Horsepower rating					
<i>Across-the-Line Motor Starting</i>			<i>Voltage (V)</i>	<i>No. of phases</i>	<i>No. of poles</i>
DOL			110 - 120	1	2
DOL			220 - 240	1	2
DOL			277 - 277	1	2
DOL			110 - 120	3	3
DOL			220 - 240	3	3
					<i>Power (HP)</i>
					0,33
					0,75
					0,75
					0,75
					1
Pilot duty rating code					
<i>Duty Code</i>					
A300					
Temp. rating of wire					
	<i>Temperature rating (°C)</i>		<i>Current (A)</i>		<i>Text</i>
	60 - 75		--		--
General Use					
<i>AC / DC</i>	<i>Voltage (V)</i>	<i>Current (A)</i>	<i>No. of phases</i>	<i>No. of poles</i>	<i>No. of contacts in series</i>
AC	120	10	1	1	1
AC	277	10	1	2	1
AC	277	10	3	3	1
CSA					
Nominal Voltage					
	<i>Voltage (V) AC / DC</i>				
	300 AC				
Rated insulation voltage U_i					
	<i>Voltage (V) AC / DC</i>				
	300 AC				
Rated thermal current					
	<i>Current (A)</i>	<i>Ambient temperature (°C)</i>		<i>Additional Text</i>	
	10	0 - 40		--	
Horsepower rating					
<i>Across-the-Line Motor Starting</i>			<i>Voltage (V)</i>	<i>No. of phases</i>	<i>No. of poles</i>
DOL			110 - 120	1	2
DOL			220 - 240	1	2
DOL			277 - 277	1	2
DOL			110 - 120	3	3
DOL			220 - 240	3	3
					<i>Power (HP)</i>
					0,33
					0,75
					0,75
					0,75
					1
Pilot duty rating code					
<i>Duty Code</i>					
A300					
Temp. rating of wire					
	<i>Temperature rating (°C)</i>		<i>Current (A)</i>		<i>Text</i>
	75		--		only

General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	120	10	1	1	1
AC	277	10	1	2	1

MASTER DATA

Max. number of stages	
number of stages	Modul
	9 FL

Switch Measures







Picture name	B	F	H	H1	H2	H3
	29,50	--	--	--	--	--

GENERAL TECHNICAL INFORMATION

Tightening torque of screws	
tightening torque (Nm)	tightening torque (lb-in)
0,40	3,50

Tested AC and DC values

Utilization category / Time constant	No. of contacts in series	Off or change-over switch	Voltage (V)	AC / DC	Current (A)
T≤1ms	1	ON - OFF	24	DC	10
T≤1ms	1	ON - OFF	48	DC	6
T≤1ms	1	ON - OFF	60	DC	2,50
T≤1ms	1	ON - OFF	110	DC	0,70
T≤1ms	1	ON - OFF	220	DC	0,30
T≤1ms	1	ON - OFF	440	DC	0,20
T≤1ms	2	ON - OFF	48	DC	10
T≤1ms	2	ON - OFF	95	DC	6
T≤1ms	2	ON - OFF	120	DC	2,50
T≤1ms	2	ON - OFF	220	DC	0,70
T≤1ms	2	ON - OFF	440	DC	0,30
T≤1ms	2	ON - OFF	660	DC	0,20
T≤1ms	3	ON - OFF	70	DC	10
T≤1ms	3	ON - OFF	140	DC	6
T≤1ms	3	ON - OFF	180	DC	2,50
T≤1ms	3	ON - OFF	330	DC	0,70
T≤1ms	3	ON - OFF	660	DC	0,30
T≤1ms	4	ON - OFF	95	DC	10
T≤1ms	4	ON - OFF	190	DC	6
T≤1ms	4	ON - OFF	240	DC	2,50
T≤1ms	4	ON - OFF	440	DC	0,70
T≤1ms	5	ON - OFF	120	DC	10
T≤1ms	5	ON - OFF	240	DC	6
T≤1ms	5	ON - OFF	300	DC	2,50
T≤1ms	5	ON - OFF	550	DC	0,70
T≤1ms	6	ON - OFF	145	DC	10
T≤1ms	6	ON - OFF	290	DC	6
T≤1ms	6	ON - OFF	360	DC	2,50
T≤1ms	6	ON - OFF	660	DC	0,70
T≤1ms	8	ON - OFF	190	DC	10
T≤1ms	8	ON - OFF	350	DC	6
T≤1ms	8	ON - OFF	450	DC	2,50
T=50ms	1	ON - OFF	24	DC	6
T=50ms	1	ON - OFF	30	DC	3
T=50ms	1	ON - OFF	48	DC	1
T=50ms	1	ON - OFF	60	DC	0,70
T=50ms	1	ON - OFF	110	DC	0,30
T=50ms	2	ON - OFF	48	DC	6
T=50ms	2	ON - OFF	60	DC	3
T=50ms	2	ON - OFF	95	DC	1
T=50ms	2	ON - OFF	120	DC	0,70
T=50ms	2	ON - OFF	220	DC	0,30
T=50ms	3	ON - OFF	70	DC	6
T=50ms	3	ON - OFF	90	DC	3
T=50ms	3	ON - OFF	140	DC	1
T=50ms	3	ON - OFF	180	DC	0,70
T=50ms	3	ON - OFF	330	DC	0,30
T=50ms	4	ON - OFF	95	DC	6
T=50ms	4	ON - OFF	120	DC	3
T=50ms	4	ON - OFF	190	DC	1
T=50ms	4	ON - OFF	240	DC	0,70
T=50ms	4	ON - OFF	440	DC	0,30
T=50ms	5	ON - OFF	120	DC	6
T=50ms	5	ON - OFF	150	DC	3
T=50ms	5	ON - OFF	240	DC	1
T=50ms	5	ON - OFF	300	DC	0,70
T=50ms	5	ON - OFF	550	DC	0,30
T=50ms	6	ON - OFF	145	DC	6

Tested AC and DC values										
Utilization category / Time constant	No. of contacts in series	Off or change-over switch	Voltage (V)		AC / DC	Current (A)				
T=50ms	6	ON - OFF	180		DC	3				
T=50ms	6	ON - OFF	290		DC	1				
T=50ms	6	ON - OFF	360		DC	0,70				
T=50ms	6	ON - OFF	660		DC	0,30				
T=50ms	8	ON - OFF	190		DC	6				
T=50ms	8	ON - OFF	240		DC	3				
T=50ms	8	ON - OFF	350		DC	1				
T=50ms	8	ON - OFF	450		DC	0,70				
Stripping length										
Length (mm) --										
6 STRIPPINGLENGTH										
Minimal ratings (voltage/current)										
Voltage (V)	Current (mA)	Environment conditions		Environment conditions 2		Environment conditions 3				
20	5	Ambient air must be free of particular contamination with sulfur and/or sulfurous components such as H2S etc.		In case extraordinary contamination with dust is expected an adequate dust protection is required.		--				
Rated short-time withstand current Icw										
Time (s)										
1										
Current (A) 60										
Size of conductor										
composition of conductor	Min. / Max. value	No. of conductor per terminal		Cross section (mm ²) or (AWG/kcmil)		Material of the wire				
solid wire	Min.	1		0.5mm ²		Copper				
solid wire	Min.	2		0.5mm ²		Copper				
flexible wire	Min.	1		0.75mm ²		Copper				
flexible wire	Min.	2		0.75mm ²		Copper				
flexible wire	Max.	2		AWG 16		Copper				
flexible wire	Max.	2		1.5mm ²		Copper				
Single-core or stranded wire	Max.	2		AWG 14		Copper				
Single-core or stranded wire	Max.	2		1.5mm ²		Copper				
flexible wire with ferrule according to DIN 46228	Max.	2		1mm ²		Copper				
flexible wire with ferrule according to DIN 46228	Min.	1		0.5mm ²		Copper				
flexible wire with ferrule according to DIN 46228	Min.	2		0.5mm ²		Copper				
Approbations										
Specification						Marking				
EAC										
CE marking										
UK Directives										
IEC 60947-3; EN 60947-3; VDE 0660 Teil107						IEC 60947-3 EN 60947-3				
UL 60947-4-1; CSA C22.2 No. 60947-4-1										
CSA C.22.2 No.14										
Russian Maritime Register of Shipping										
Power loss per pole										
Power (W) 0,40										
Mechanical life										
No. of operations		Ambient temperature (°C)			Number of stages		Limitations			
1000000		-5 - 55					Valid for manual operation. Valid for switches without optional extras. The value refers to the mechanics of the device, for lifetime of the electrical contacts please refer to "electrical life - values".			
Electrical life (B10-Value)										
Utilization category	cos(φ)	Time constant (ms)	Voltage (V)	Current (A)	No. of operations	number of series contacts		AC/DC	No. of phases	No. of poles
--	0,59	--	122	10	50000	1		AC	1	1
--	0,59	--	220	5	150000	1		AC	1	1
--	0,59	--	220	10	25000	1		AC	1	1
--	0,95	--	220	10	25000	1		AC	1	1
--	0,65	--	380	5	100000	1		AC	1	1
AC-3	--	--	440	7	150000	1		AC	3	3
AC-23	--	--	440	10	25000	1		AC	3	3
--	--	1	24	10	140000	1		DC	1	1
--	--	1	48	6	50000	1		DC	1	1
--	--	1	60	2,50	200000	1		DC	1	1

Electrical life (B10-Value)									
Utilization category	cos(φ)	Time constant (ms)	Voltage (V)	Current (A)	No. of operations	number of series contacts	AC/DC	No. of phases	No. of poles
--	--	1	110	0,70	100000	1 DC		1	1
--	--	1	220	0,30	200000	1 DC		1	1
--	--	1	440	0,20	200000	1 DC		1	1
--	--	48	24	0,25	400000	1 DC		1	1
--	--	50	24	0,50	100000	1 DC		1	1
--	--	50	24	1	50000	1 DC		1	1
--	--	50	24	6	10000	1 DC		1	1
--	--	50	30	3	20000	1 DC		1	1
--	--	50	48	1	50000	1 DC		1	1
--	--	50	60	0,70	70000	1 DC		1	1
--	--	50	110	0,30	75000	1 DC		1	1
--	--	50	110	0,50	50000	1 DC		1	1
--	--	53	110	0,10	200000	1 DC		1	1
--	--	55	110	1	25000	1 DC		1	1
--	--	100	110	0,50	30000	1 DC		1	1
--	--	100	110	1	15000	1 DC		1	1

Recommended screw driver

Type of screw driver	Value
Cross Screwdriver	PH1
Flat blade	0,6x3,5

Degree of protection

IP - Code switch terminal	
IP20	

Conditions during transport and storing

Minimum temperature (°C)	Maximum temperature (°C)	additional requirements
-40	85	In case of temperatures below -5°C no shock load permissible

Shock / Vibration

Type of oscillation	Values
Resistance to vibration	Min. 4g, 2-100Hz, 1,6mm
Resistance to shock	Min. 5g, 6ms

General Information

Text

- DC switching capacity applies to ON/OFF switches.
- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- Use copper wire only. Do not coat the wire end with tin.
- Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.
- After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.

Creepage distance

	Distance (mm)
	6,35

Clearance

	Distance (mm)
	6,35

Distance of stages

	Distance (mm)
	8

Operating temperature


Min. Temperature [°C]	Max. Temperature [°C]
-25	60

Waste Electrical & Electronic Equipment (WEEE)


Picture name	Description
	

Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .



Mounting-E

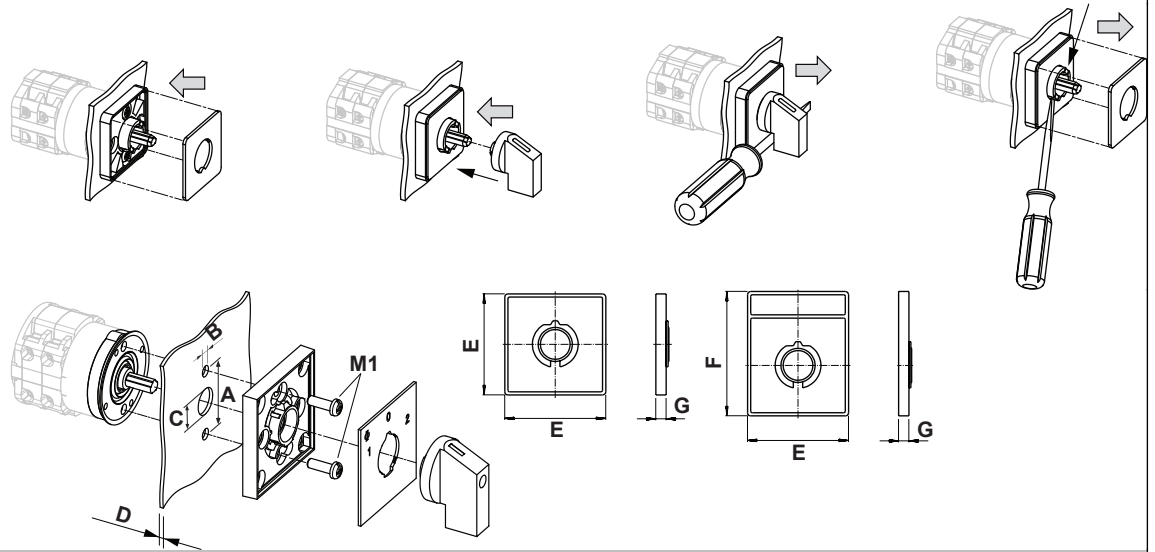

IP - Code front side		IP40
Stages		1,00 - 12,00
A	H	20,00 mm
B	Ø	3,20 mm
C	Ø	8,00 - 11,00 mm
D	H	<= 4,00 mm
E	H	30,00 mm
F	H	39,00 mm
G	H	5,50 mm
M1	⌀	0,40 Nm

Wiring diagram
CA4.A213.E


 Kraus & Naimer

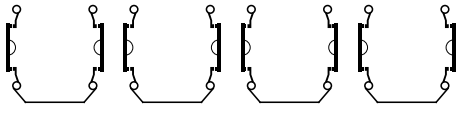		CA4				A213				Page 1 of 1			
Face Plate													
		1	3	5	7	9	11	13	15	17	19	21	23
													
Switching Angle <input type="text" value="60"/> Total switching Angle <input type="text" value="120"/>		2	4	6	8	10	12	14	16	18	20	22	24
1			■		■		■		■				
0													
2		■		■		■		■					
300													
315													
330													
345													
0													
15													
30													
45													
60		■		■		■		■					
75													
90													
105													
120													
135													
150													
165													
180													
195													
210													
225													
240													
255													
270													
285													

Version: 93

Face plate

S00.F071/A1B.PE

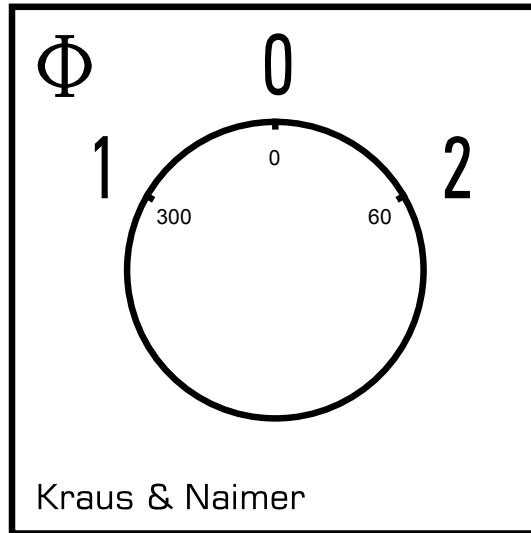

HANDLES

Designation: S00.G251
Handle colour: "1" black

