



Sample image

Datasheet


Article number: 70005249
Designation: CA20.A213.EF
Description: Schalter
Contact development: A213
Face plate engraving: F071
Type of mounting: EF


Type Size: S0
Classification Contact: Rigid contact bridge
Classification Contact Mat: Silver
Classification Terminal: Screw terminal







IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage Ui						
			Voltage (V) AC / DC			
			690 AC / DC			
Rated impulse withstand voltage Uimp						
Voltage (kV)	Overvoltage category	Pollution degree	Supply system			Function
6 III		3	Valid for lines with grounded common neutral termination			switch
Rated uninterrupted current Iu/Ith						
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements			
25	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C			
Conventional enclosed thermal current Ithe						
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	Additional requirements	No. of stages (from - to)	Mounting	Mounting size
25	35	40	Ambient temperature +35°C during 24 hours with peaks up to +40°C	--	--	--
Rated operational current Ie						
Utilization category			Voltage (V)		Current (A)	
AC-15			220 - 240		8	
AC-15			380 - 440		5	
AC-20A			690		25	
AC-21A			20 - 690		25	
AC-22A			220 - 500		25	
AC-22A			660 - 690		25	
Rated operational power						
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)		
AC-2	220 - 240	3	3	5,50		
AC-2	380 - 440	3	3	11		
AC-2	500 - 500	3	3	15		
AC-2	660 - 690	3	3	13		
AC-3	220 - 240	3	3	4		
AC-3	380 - 440	3	3	7,50		
AC-3	500 - 500	3	3	7,50		
AC-3	660 - 690	3	3	7,50		
AC-3	110 - 120	1	2	1,50		
AC-3	220 - 240	1	2	3		
AC-3	380 - 440	1	2	3,70		
AC-4	220 - 240	3	3	1,50		
AC-4	380 - 440	3	3	3		
AC-4	500 - 500	3	3	3		
AC-4	660 - 690	3	3	3		
AC-4	110 - 120	1	2	0,45		
AC-4	220 - 240	1	2	1,10		
AC-4	380 - 440	1	2	2,20		
AC-23A	220 - 240	3	3	5,50		
AC-23A	380 - 440	3	3	11		
AC-23A	500 - 500	3	3	11		
AC-23A	660 - 690	3	3	11		
AC-23A	110 - 120	1	2	1,50		
AC-23A	220 - 240	1	2	3		
AC-23A	380 - 440	1	2	5,50		
Max Fuse Rating IEC						
Fuse characteristic			No. of Fuses		Current (A)	
gG			1		35	



Tested AC and DC values					
Utilization category / Time constant	No. of contacts in series	Off or change-over switch	Voltage (V)	AC / DC	Current (A)
DC-13	1	ON - OFF	24	DC	4
DC-13	1	ON - OFF	48	DC	2,40
DC-13	1	ON - OFF	60	DC	1,80
DC-13	1	ON - OFF	110	DC	1
DC-13	1	ON - OFF	220	DC	0,35
DC-13	2	ON - OFF	48	DC	4
DC-13	2	ON - OFF	96	DC	2,40
DC-13	2	ON - OFF	120	DC	1,80
DC-13	2	ON - OFF	220	DC	1
DC-13	2	ON - OFF	440	DC	0,35
DC-21A	1	ON - OFF	24	DC	25
DC-21A	1	ON - OFF	48	DC	25
DC-21A	1	ON - OFF	60	DC	25
DC-21A	1	ON - OFF	110	DC	6
DC-21A	1	ON - OFF	220	DC	1
DC-21A	2	ON - OFF	48	DC	21
DC-21A	2	ON - OFF	96	DC	18
DC-21A	2	ON - OFF	120	DC	17
DC-21A	2	ON - OFF	220	DC	6
DC-21A	2	ON - OFF	440	DC	1
DC-21A	3	ON - OFF	72	DC	21
DC-21A	3	ON - OFF	144	DC	18
DC-21A	3	ON - OFF	180	DC	17
DC-21A	3	ON - OFF	330	DC	6
DC-21A	3	ON - OFF	660	DC	1
DC-21A	4	ON - OFF	96	DC	21
DC-21A	4	ON - OFF	192	DC	18
DC-21A	4	ON - OFF	240	DC	17
DC-21A	4	ON - OFF	440	DC	6
DC-21A	5	ON - OFF	120	DC	21
DC-21A	5	ON - OFF	240	DC	18
DC-21A	5	ON - OFF	300	DC	17
DC-21A	5	ON - OFF	550	DC	6
DC-21A	6	ON - OFF	144	DC	21
DC-21A	6	ON - OFF	288	DC	18
DC-21A	6	ON - OFF	360	DC	17
DC-21A	6	ON - OFF	660	DC	6
DC-21A	8	ON - OFF	192	DC	21
DC-21A	8	ON - OFF	384	DC	18
DC-21A	8	ON - OFF	480	DC	17
DC-22A	1	ON - OFF	24	DC	25
DC-22A	1	ON - OFF	48	DC	25
DC-22A	1	ON - OFF	60	DC	16
DC-22A	1	ON - OFF	110	DC	2
DC-22A	1	ON - OFF	220	DC	0,30
DC-22A	2	ON - OFF	48	DC	18
DC-22A	2	ON - OFF	96	DC	17
DC-22A	2	ON - OFF	120	DC	16
DC-22A	2	ON - OFF	220	DC	2
DC-22A	2	ON - OFF	440	DC	0,30
DC-22A	3	ON - OFF	72	DC	18
DC-22A	3	ON - OFF	144	DC	17
DC-22A	3	ON - OFF	180	DC	16
DC-22A	3	ON - OFF	330	DC	2
DC-22A	3	ON - OFF	660	DC	0,30
DC-22A	4	ON - OFF	96	DC	18
DC-22A	4	ON - OFF	192	DC	17
DC-22A	4	ON - OFF	240	DC	16
DC-22A	4	ON - OFF	440	DC	2
DC-22A	5	ON - OFF	120	DC	18
DC-22A	5	ON - OFF	240	DC	17
DC-22A	5	ON - OFF	300	DC	16
DC-22A	5	ON - OFF	550	DC	2
DC-22A	6	ON - OFF	144	DC	18
DC-22A	6	ON - OFF	288	DC	17
DC-22A	6	ON - OFF	360	DC	16
DC-22A	6	ON - OFF	660	DC	2
DC-22A	8	ON - OFF	192	DC	18
DC-22A	8	ON - OFF	384	DC	17
DC-22A	8	ON - OFF	480	DC	16
DC-23A	1	ON - OFF	24	DC	25
DC-23A	1	ON - OFF	48	DC	25
DC-23A	1	ON - OFF	60	DC	14
DC-23A	1	ON - OFF	110	DC	1,70
DC-23A	1	ON - OFF	220	DC	0,20
DC-23A	2	ON - OFF	48	DC	16

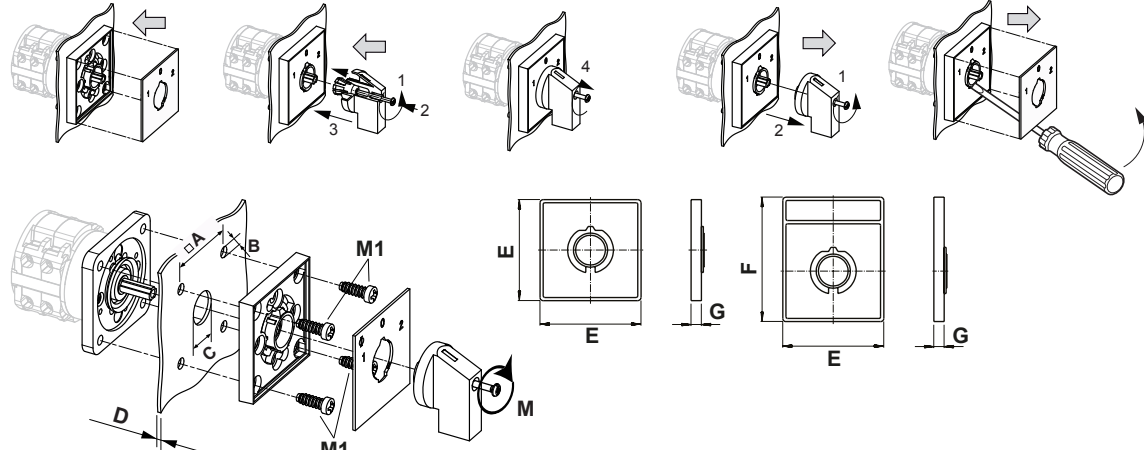
Tested AC and DC values					
<i>Utilization category / Time constant</i>	<i>No. of contacts in series</i>	<i>Off or change-over switch</i>	<i>Voltage (V) AC / DC</i>		<i>Current (A)</i>
DC-23A	2	ON - OFF	96	DC	15
DC-23A	2	ON - OFF	120	DC	14
DC-23A	2	ON - OFF	220	DC	1,70
DC-23A	2	ON - OFF	440	DC	0,20
DC-23A	3	ON - OFF	72	DC	16
DC-23A	3	ON - OFF	144	DC	15
DC-23A	3	ON - OFF	180	DC	14
DC-23A	3	ON - OFF	330	DC	1,70
DC-23A	3	ON - OFF	660	DC	0,20
DC-23A	4	ON - OFF	96	DC	16
DC-23A	4	ON - OFF	192	DC	15
DC-23A	4	ON - OFF	240	DC	14
DC-23A	4	ON - OFF	440	DC	1,70
DC-23A	5	ON - OFF	120	DC	16
DC-23A	5	ON - OFF	240	DC	15
DC-23A	5	ON - OFF	300	DC	14
DC-23A	5	ON - OFF	550	DC	1,70
DC-23A	6	ON - OFF	144	DC	16
DC-23A	6	ON - OFF	288	DC	15
DC-23A	6	ON - OFF	360	DC	14
DC-23A	6	ON - OFF	660	DC	1,70
DC-23A	8	ON - OFF	192	DC	16
DC-23A	8	ON - OFF	384	DC	15
DC-23A	8	ON - OFF	480	DC	14
Rated conditional short-circuit current					
	<i>Current (kA)</i>	<i>Text</i>	<i>cut-off current I_c (kA)</i>		<i>Durchlassenergie I²t (kA²s)</i>
	1	--	1,34		7,66
Rated breaking capacity					
	<i>Voltage (V)</i>		<i>Current (A)</i>	<i>Utilization category / UL (DOL)</i>	
	220 - 240		200	--	
	380 - 440		200	--	
	660 - 690		125	--	
Rated short-circuit making capacity I_{cm}					
					<i>Current (A)</i>
					700
UL60947-4-1 , UL508					
Nominal Voltage					
			<i>Voltage (V) AC / DC</i>		
			600 AC		
Rated insulation voltage U_i					
			<i>Voltage (V) AC / DC</i>		
			600 AC		
Rated thermal current					
	<i>Current (A)</i>		<i>Ambient temperature (°C)</i>	<i>Additional Text</i>	
	30		0 - 40	--	
Horsepower rating					
<i>Across-the-Line Motor Starting</i>			<i>Voltage (V)</i>	<i>No. of phases</i>	<i>No. of poles</i>
Reversing			110 - 120	1	2
Reversing			220 - 240	1	2
Reversing			277 - 277	1	2
Reversing			415 - 415	1	2
Reversing			440 - 480	1	2
Reversing			550 - 600	1	2
Reversing			110 - 120	3	3
Reversing			220 - 240	3	3
Reversing			415 - 415	3	3
Reversing			440 - 480	3	3
Reversing			550 - 600	3	3
DOL			110 - 120	1	2
DOL			220 - 240	1	2
DOL			277 - 277	1	2
DOL			415 - 415	1	2
DOL			440 - 480	1	2
DOL			550 - 600	1	2
DOL			110 - 120	3	3
DOL			220 - 240	3	3
DOL			415 - 415	3	3
DOL			440 - 480	3	3
DOL			550 - 600	3	3
Pilot duty rating code					
<i>Duty Code</i>					
A600					
SCCR / Max. fuse rating					
<i>Conditions of acceptability</i>					
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnect are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.					

Temp. rating of wire					
Temperature rating (°C)			Current (A) Text		
75			-- --		
Connecting instructions					
<i>Markings</i>					
When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.					
General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	600	30	1	2	1
AC	600	30	3	3	1
Suitable as Motor disconnect					
Yes/No					
Y					
CSA					
Nominal Voltage					
			Voltage (V) AC / DC		
			600 AC		
Rated insulation voltage Ui					
			Voltage (V) AC / DC		
			600 AC		
Rated thermal current					
			Current (A)		Ambient temperature (°C) Additional Text
			30		0 - 40 --
Horsepower rating					
<i>Across-the-Line Motor Starting</i>			Voltage (V)	No. of phases	No. of poles Power (HP)
DOL			110 - 120	1	2 1,50
DOL			220 - 240	1	2 3
DOL			277 - 277	1	2 3
DOL			415 - 415	1	2 5
DOL			440 - 480	1	2 5
DOL			550 - 600	1	2 5
DOL			110 - 120	3	3 3
DOL			220 - 240	3	3 7,50
DOL			415 - 415	3	3 10
DOL			440 - 480	3	3 10
DOL			550 - 600	3	3 10
Pilot duty rating code					
<i>Duty Code</i>					
A600					
Temp. rating of wire					
Temperature rating (°C)			Current (A) Text		
75			-- only		
General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	600	30	1	1	1
MASTER DATA					
Max. number of stages					
			number of stages Modul		
			12 FL		
Switch Measures					
<i>Picture name</i>	B	F	H	H1	H2 H3
	45	--	--	--	--
GENERAL TECHNICAL INFORMATION					
Tightening torque of screws					
			tightening torque (Nm)		tightening torque (lb-in)
			1		9
Tested AC and DC values					
<i>Utilization category / Time constant</i>	No. of contacts in series	Off or change-over switch	Voltage (V)	AC / DC	Current (A)
Ts1ms	1	ON - OFF	24	DC	25
Ts1ms	1	ON - OFF	48	DC	20
Ts1ms	1	ON - OFF	60	DC	7,50
Ts1ms	1	ON - OFF	110	DC	1,50
Ts1ms	1	ON - OFF	220	DC	0,50
Ts1ms	1	ON - OFF	440	DC	0,30
Ts1ms	2	ON - OFF	48	DC	25
Ts1ms	2	ON - OFF	95	DC	20
Ts1ms	2	ON - OFF	120	DC	7,50
Ts1ms	2	ON - OFF	220	DC	1,50
Ts1ms	2	ON - OFF	440	DC	0,50
Ts1ms	2	ON - OFF	660	DC	0,30
Ts1ms	3	ON - OFF	70	DC	25
Ts1ms	3	ON - OFF	140	DC	20
Ts1ms	3	ON - OFF	180	DC	7,50
Ts1ms	3	ON - OFF	330	DC	1,50

Tested AC and DC values					
Utilization category / Time constant	No. of contacts in series	Off or change-over switch	Voltage (V)	AC / DC	Current (A)
T≤1ms	3	ON - OFF	660	DC	0,50
T≤1ms	4	ON - OFF	95	DC	25
T≤1ms	4	ON - OFF	190	DC	20
T≤1ms	4	ON - OFF	240	DC	7,50
T≤1ms	4	ON - OFF	440	DC	1,50
T≤1ms	5	ON - OFF	120	DC	25
T≤1ms	5	ON - OFF	240	DC	20
T≤1ms	5	ON - OFF	300	DC	7,50
T≤1ms	5	ON - OFF	550	DC	1,50
T≤1ms	6	ON - OFF	145	DC	25
T≤1ms	6	ON - OFF	290	DC	20
T≤1ms	6	ON - OFF	360	DC	7,50
T≤1ms	6	ON - OFF	660	DC	1,50
T≤1ms	8	ON - OFF	190	DC	25
T≤1ms	8	ON - OFF	350	DC	20
T≤1ms	8	ON - OFF	450	DC	7,50
T=50ms	1	ON - OFF	24	DC	20
T=50ms	1	ON - OFF	30	DC	9
T=50ms	1	ON - OFF	48	DC	3
T=50ms	1	ON - OFF	60	DC	1,50
T=50ms	1	ON - OFF	110	DC	0,50
T=50ms	2	ON - OFF	48	DC	20
T=50ms	2	ON - OFF	60	DC	9
T=50ms	2	ON - OFF	95	DC	3
T=50ms	2	ON - OFF	120	DC	1,50
T=50ms	2	ON - OFF	220	DC	0,50
T=50ms	3	ON - OFF	70	DC	20
T=50ms	3	ON - OFF	90	DC	9
T=50ms	3	ON - OFF	140	DC	3
T=50ms	3	ON - OFF	180	DC	1,50
T=50ms	3	ON - OFF	330	DC	0,50
T=50ms	4	ON - OFF	95	DC	20
T=50ms	4	ON - OFF	120	DC	9
T=50ms	4	ON - OFF	190	DC	3
T=50ms	4	ON - OFF	240	DC	1,50
T=50ms	4	ON - OFF	440	DC	0,50
T=50ms	5	ON - OFF	120	DC	20
T=50ms	5	ON - OFF	150	DC	9
T=50ms	5	ON - OFF	240	DC	3
T=50ms	5	ON - OFF	300	DC	1,50
T=50ms	5	ON - OFF	550	DC	0,50
T=50ms	6	ON - OFF	145	DC	20
T=50ms	6	ON - OFF	180	DC	9
T=50ms	6	ON - OFF	290	DC	3
T=50ms	6	ON - OFF	360	DC	1,50
T=50ms	6	ON - OFF	660	DC	0,50
T=50ms	8	ON - OFF	190	DC	20
T=50ms	8	ON - OFF	240	DC	9
T=50ms	8	ON - OFF	350	DC	3
T=50ms	8	ON - OFF	450	DC	1,50
Stripping length					
Length (mm) --					
9 STRIPPINGLENGTH					
Minimal ratings (voltage/current)					
Voltage (V)	Current (mA)	Environment conditions	Environment conditions 2	Environment conditions 3	
20	5	Ambient air must be free of particular contamination with sulfur and/or sulfurous components such as H2S etc.	In case extraordinary contamination with dust is expected an adequate dust protection is required.	--	
Rated short-time withstand current Icw					
Time (s)					Current (A)
1					280
Size of conductor					
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)		Material of the wire
solid wire	Min.	1	0.75mm ²		Copper
solid wire	Min.	2	0.75mm ²		Copper
flexible wire	Max.	2	AWG 12		Copper
flexible wire	Max.	2	4mm ²		Copper
flexible wire	Min.	1	1.5mm ²		Copper
flexible wire	Min.	2	1.5mm ²		Copper
Single-core or stranded wire	Max.	2	AWG 10		Copper
Single-core or stranded wire	Max.	2	4mm ²		Copper
flexible wire with ferrule according to DIN 46228	Max.	2	2.5mm ²		Copper
flexible wire with ferrule according to DIN 46228	Min.	1	1mm ²		Copper
flexible wire with ferrule according to DIN 46228	Min.	2	1mm ²		Copper
Approbations					
Specification					Marking
EAC					

Approbations									
Specification							Marking		
CE marking									
UK Directives									
IEC 60947-3; EN 60947-3; VDE 0660 Teil107							IEC 60947-3 EN 60947-3		
UL 60947-4-1; CSA C22.2 No. 60947-4-1									
CSA C.22.2 No.14									
GB/T14048.3							 GB/T14048.3		
Russian Maritime Register of Shipping									
Power loss per pole							Power (W) 0,90		
Mechanical life									
		No. of operations		Ambient temperature (°C)		Number of stages		Limitations	
		1000000		-5 - 55				Valid for manual operation. Valid for switches without optional extras. The value refers to the mechanics of the device, for lifetime of the electrical contacts please refer to "electrical life - values".	
Electrical life (B10-Value)									
Utilization category	cos(φ)	Time constant (ms)	Voltage (V)	Current (A)	No. of operations	number of series contacts	AC/DC	No. of phases	No. of poles
--	0,59	--	220	10	1000000	1	AC	1	1
--	0,59	--	220	15	500000	1	AC	1	1
--	0,64	--	220	20	200000	1	AC	1	1
--	0,65	--	380	5	500000	1	AC	1	1
--	0,64	--	380	10	500000	1	AC	1	1
--	0,64	--	380	15	300000	1	AC	1	1
--	0,65	--	380	20	200000	1	AC	1	1
AC-3	--	--	440	15,50	200000	1	AC	3	3
AC-23	--	--	440	22	200000	1	AC	3	3
AC-3	--	--	690	9	200000	1	AC	3	3
AC-23	--	--	690	13	200000	1	AC	3	3
AC-22	--	--	690	25	100000	1	AC	3	3
--	--	1	24	25	200000	1	DC	1	1
--	--	1	48	20	200000	1	DC	1	1
--	--	1	60	10	90000	1	DC	1	1
--	--	1	110	1,50	140000	1	DC	1	1
--	--	1	220	0,50	200000	1	DC	1	1
--	--	1	440	0,30	200000	1	DC	1	1
--	--	50	24	1	400000	1	DC	1	1
--	--	50	24	20	8000	1	DC	1	1
--	--	50	30	9	50000	1	DC	1	1
--	--	50	48	1	80000	1	DC	1	1
--	--	50	48	4	100000	1	DC	1	1
--	--	50	50	4	100000	1	DC	1	1
--	--	50	60	2	90000	1	DC	1	1
--	--	50	110	0,50	200000	1	DC	1	1
--	--	55	110	1	200000	1	DC	1	1
--	--	55	110	1,50	100000	1	DC	1	1
--	--	55	220	0,50	100000	1	DC	1	1
--	--	100	110	0,50	100000	1	DC	1	1
--	--	100	110	1	48000	1	DC	1	1
Recommended screw driver									
Type of screw driver				Value					
Cross Screwdriver				PH1					
Flat blade				0,8x5,5					
Degree of protection									
IP - Code switch terminal									
IP20									
Conditions during transport and storing									
Minimum temperature (°C)					Maximum temperature (°C) additional requirements				
-40					85 In case of temperatures below -5°C no shock load permissible				
Shock / Vibration									
Type of oscillation				Values					
Resistance to vibration				Min. 4g, 2-100Hz, 1,6mm					
Resistance to shock				Min. 5g, 6ms					
Resistance to shock				min. 5g, 30ms					


Shock / Vibration	
Type of oscillation	Values
Resistance to vibration	IEC 61373 (1999) Category 1, Class B
General Information	
Text	
<ul style="list-style-type: none"> - DC switching capacity applies to ON/OFF switches. - Do not lubricate or treat contacts. - Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology. - Use copper wire only. Do not coat the wire end with tin. - Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications. - After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards. 	
Creepage distance	
	Distance (mm) 12,70
Clearance	
	Distance (mm) 9,50
Distance of stages	
	Distance (mm) 12,70
Operating temperature	
	Min. Temperature [°C] -25
	Max. Temperature [°C] 60
Waste Electrical & Electronic Equipment (WEEE)	
Picture name	Description
	
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company, return to the supplier for disposal, or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com
Proposition 65	
Picture name	Description
	
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .


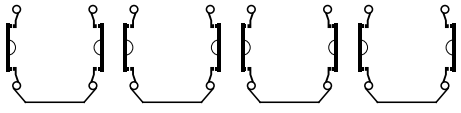
Mounting-EF	
	
IP - Code front side	IP66, IP67, IP69k
Stages	1,00 - 12,00
A	□ 36,00 mm
B	∅ 5,00 mm
C	∅ 15,00 - 19,00 mm
D	H ≤ 4,00 mm
E	H 48,00 mm
F	H 59,00 mm

G	H	6,70 mm
M	\vec{M}	0,50 Nm
M1	\vec{M}	0,90 Nm

Wiring diagram

CA20.A213.EF

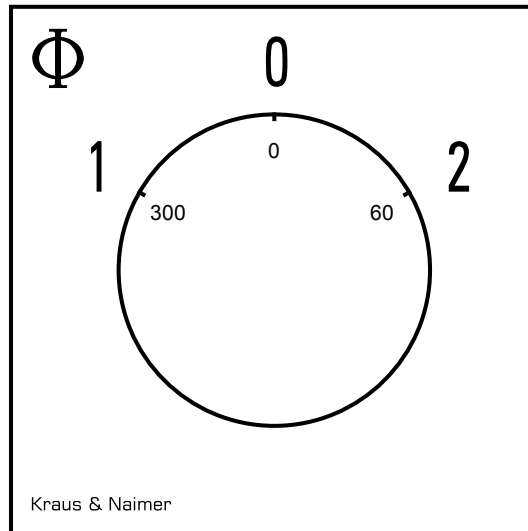
 Kraus & Naimer

		CA20				A213				Page 1 of 1			
Face Plate													
		1	3	5	7	9	11	13	15	17	19	21	23
													
Switching Angle <input type="text" value="60"/> Total switching Angle <input type="text" value="120"/>		2	4	6	8	10	12	14	16	18	20	22	24
1	300		■		■		■		■				
	315												
	330												
	345												
0	0												
	15												
	30												
	45												
2	60	■		■		■		■					
	75												
	90												
	105												
	120												
	135												
	150												
	165												
	180												
	195												
	210												
	225												
	240												
	255												
	270												
	285												

Version: 93

Face plate

S0.F071/A1B.PEL



HANDLES

Designation: S0C.G251
Handle colour: "1" black

