




Sample image

Datasheet

Article number: 70012736
Designation: KG64.T204/33.KL11V
Description: Schalter globaler Trenner
Contact development: T304
Face plate engraving: F656
Type of mounting: KL11V













Type Size: S0
Classification Contact: Rigid contact bridge
Classification Contact Mat: Silver
Classification Terminal: Screw terminal

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage Ui						
			Voltage (V) AC / DC			
			690 AC			
Rated impulse withstand voltage Uimp						
Voltage (kV)		Overvoltage category	Pollution degree	Supply system		Function
6		III	3	Valid for lines with grounded common neutral termination		switch
Rated uninterrupted current Iu/Ith						
Current (A)		Ambient temperature (°C)		Peak temperature (°C) additional requirements		
63		50		55 Ambient temperature +50°C during 24 hours with peaks up to +55°C		
Conventional enclosed thermal current Ithe						
Current (A)		Ambient temperature (°C)	Peak temperature (°C)	Additional requirements		No. of stages (from - to) Mounting Mounting size
63		35	40	Ambient temperature +35°C during 24 hours with peaks up to +40°C		-- -- --
Rated operational current Ie						
Utilization category			Voltage (V)		Current (A)	
AC-32A			20 - 400		63	
AC-20A			690		63	
AC-21A			20 - 690		63	
AC-22A			220 - 500		63	
AC-22A			660 - 690		55	
Rated operational power						
Utilization category		Voltage (V)		No. of phases		No. of poles Power (kW)
AC-3		220 - 240		3		3 11
AC-3		380 - 440		3		3 18,50
AC-3		500 - 500		3		3 22
AC-3		660 - 690		3		3 15
AC-23A		220 - 240		3		3 11
AC-23A		380 - 440		3		3 22
AC-23A		500 - 500		3		3 30
AC-23A		660 - 690		3		3 18,50
Max Fuse Rating IEC						
Fuse characteristic			No. of Fuses		Current (A)	
gG			1		63	
Rated conditional short-circuit current						
Current (kA)		Text		cut-off current Ic (kA)		Durchlassenergie I²t (kA²s)
15		--		5,10		17,57
Rated breaking capacity						
		Voltage (V)		Current (A) Utilization category / UL (DOL)		
		220 - 240		350 --		
		380 - 440		350 --		
		660 - 690		190 --		
Rated short-circuit making capacity Icm						
						Current (A)
						3000
UL60947-4-1 , UL508						
Nominal Voltage						
			Voltage (V) AC / DC			
			600 AC			
Rated insulation voltage Ui						
			Voltage (V) AC / DC			
			600 AC			

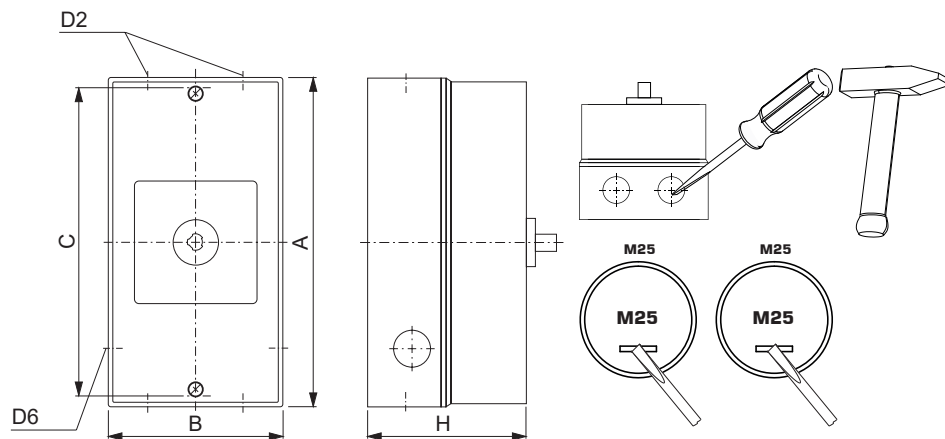
Rated thermal current						
Current (A)			Ambient temperature (°C)		Additional Text	
60			0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting			Voltage (V)	No. of phases	No. of poles	Power (HP)
DOL			110 - 120	1	2	3
DOL			220 - 240	1	2	7,50
DOL			277 - 277	1	2	7,50
DOL			415 - 415	1	2	10
DOL			440 - 480	1	2	15
DOL			550 - 600	1	2	15
DOL			110 - 120	3	3	5
DOL			220 - 240	3	3	15
DOL			415 - 415	3	3	20
DOL			440 - 480	3	3	30
DOL			550 - 600	3	3	40
SCCR / Max. fuse rating						
Conditions of acceptability						
This device is suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses.						
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by 70A Class J fuses.						
Temp. rating of wire						
Temperature rating (°C)			Current (A)		Text	
60 - 75			--		--	
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	60	1	1	1	
AC	600	60	1	2	1	
AC	600	60	3	3	1	
Suitable as Motor disconnect						
Yes/No						
Y						
General Information						
Text						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						
- When intended for use as a motor disconnect the device shall be provided with a method of being locked in the OFF-position.						
CSA						
Nominal Voltage						
			Voltage (V)		AC / DC	
			600		AC	
Rated insulation voltage Ui						
			Voltage (V)		AC / DC	
			600		AC	
Rated thermal current						
Current (A)			Ambient temperature (°C)		Additional Text	
60			0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting			Voltage (V)	No. of phases	No. of poles	Power (HP)
DOL			110 - 120	1	2	3
DOL			220 - 240	1	2	7,50
DOL			277 - 277	1	2	7,50
DOL			415 - 415	1	2	10
DOL			440 - 480	1	2	15
DOL			550 - 600	1	2	15
DOL			110 - 120	3	3	5
DOL			220 - 240	3	3	15
DOL			415 - 415	3	3	20
DOL			440 - 480	3	3	30
DOL			550 - 600	3	3	40
Temp. rating of wire						
Temperature rating (°C)			Current (A)		Text	
75			--		--	
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	60	1	1	1	
AC	600	60	1	2	1	
AC	600	60	3	3	1	
MASTER DATA						
Max. number of stages						
			number of stages		Modul	
			4		KO	
Switch Measures						
Picture name	B	F	H	H1	H2	H3
	--	--	64	--	--	--

GENERAL TECHNICAL INFORMATION

GENERAL TECHNICAL INFORMATION									
Tightening torque of screws			tightening torque (Nm)				tightening torque (lb-in)		
			1,80				16		
Stripping length									
Length (mm) --									
12 STRIPPINGLENGTH									
Minimal ratings (voltage/current)									
Voltage (V)		Current (mA)		Environment conditions		Environment conditions 2		Environment conditions 3	
20		5		Ambient air must be free of particular contamination with sulfur and/or sulfurous components such as H2S etc.		In case extraordinary contamination with dust is expected an adequate dust protection is required.		--	
Rated short-time withstand current Icw									
					Time (s)		Current (A)		
					1		580		
Size of conductor									
composition of conductor		Min. / Max. value		No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)		Material of the wire	
solid wire		Min.		2		0.75mm²		Copper	
solid wire		Min.		1		1.5mm²		Copper	
flexible wire		Max.		1		AWG 6		Copper	
flexible wire		Min.		1		2.5mm²		Copper	
flexible wire		Max.		1		10mm²		Copper	
flexible wire		Min.		2		1.5mm²		Copper	
Single-core or stranded wire		Max.		1		AWG 6		Copper	
Single-core or stranded wire		Max.		1		16mm²		Copper	
flexible wire with sleeve		Max.		1		10mm²		Copper	
flexible wire with ferrule according to DIN 46228		Min.		2		0.75mm²		Copper	
flexible wire with ferrule according to DIN 46228		Min.		1		1.5mm²		Copper	
Approbations									
Specification						Marking			
EAC									
CE marking									
UK Directives									
Lloyd's Register EMEA									
IEC 60947-3; EN 60947-3; VDE 0660 Teil107						IEC 60947-3 EN 60947-3			
UL 60947-4-1; CSA C22.2 No. 60947-4-1									
CSA C.22.2 No.14									
GB/T14048.3									
Russian Maritime Register of Shipping									
Power loss per pole									
						Power (W)			
						2,20			
Mechanical life									
No. of operations			Ambient temperature (°C)			Number of stages		Limitations	
150000			-5 - 55					Valid for manual operation. Valid for switches without optional extras. The value refers to the mechanics of the device, for lifetime of the electrical contacts please refer to "electrical life - values".	
Electrical life (B10-Value)									
Utilization category	cos(φ)	Time constant (ms)	Voltage (V)	Current (A)	No. of operations	number of series contacts	AC/DC	No. of phases	No. of poles
--	0,64	--	220	20	200000	1	AC	1	1
--	0,65	--	380	20	200000	1	AC	1	1
AC-23	--	--	500	45	94000	1	AC	3	3
AC-22	--	--	500	63	50000	1	AC	3	3
AC-23	--	--	690	22,40	150000	1	AC	3	3
--	--	50	60	2	100000	1	DC	1	1
--	--	55	110	1,50	75000	1	DC	1	1
Recommended screw driver									
Type of screw driver				Value					
Cross Screwdriver				PH2					
Flat blade				1x5,5					

Degree of protection																									
IP - Code switch terminal																									
IP20																									
Conditions during transport and storing																									
Minimum temperature (°C)	Maximum temperature (°C) additional requirements																								
-40	85 In case of temperatures below -5°C no shock load permissible																								
Shock / Vibration																									
Type of oscillation	Values																								
Resistance to vibration	Min. 4g, 2-100Hz, 1,6mm																								
Resistance to shock	min. 6g, 6ms																								
General Information																									
Text																									
- EMC Note: This device is suitable for use in environment A and B. - Do not lubricate or treat contacts. - Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology. - Use copper wire only. Do not coat the wire end with tin. - Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.																									
Creepage distance																									
	Distance (mm)																								
	12,70																								
Clearance																									
	Distance (mm)																								
	12,70																								
Further Pictures																									
Picture Purpose	Picture Name																								
	H010/A, H010/C																								
	H010/B																								
	<table><tr><td>Mounting Bauform</td><td>1NO + 1NC</td><td>2x 1NO + 1NC</td><td>Mounting Bauform</td><td>1NO + 1NC</td><td>2x 1NO + 1NC</td></tr><tr><td>E</td><td></td><td></td><td>E</td><td></td><td></td></tr><tr><td>VE</td><td></td><td></td><td>VE</td><td></td><td></td></tr></table>	Mounting Bauform	1NO + 1NC	2x 1NO + 1NC	Mounting Bauform	1NO + 1NC	2x 1NO + 1NC	E			E			VE			VE								
Mounting Bauform	1NO + 1NC	2x 1NO + 1NC	Mounting Bauform	1NO + 1NC	2x 1NO + 1NC																				
E			E																						
VE			VE																						
<table><tr><th colspan="2">Technical Data according to UL Specifications</th><th>Auxiliary Contacts KG20 - KG64B</th><th>Auxiliary Contacts KG80 - KG105C</th></tr><tr><td>Rated Voltage</td><td>V A. C.</td><td>600</td><td>600</td></tr><tr><td>Ampere Rating</td><td>A</td><td>10</td><td>10</td></tr><tr><td>Type of wire</td><td>-</td><td>Use 60/75°C copper wire only</td><td>Use 75°C copper wire only</td></tr><tr><td>Temperature rating of wire</td><td>°C</td><td>60/75</td><td>75</td></tr><tr><td>Torque value for field wiring terminals</td><td>lb-in. Nm</td><td>-</td><td>-</td></tr></table>		Technical Data according to UL Specifications		Auxiliary Contacts KG20 - KG64B	Auxiliary Contacts KG80 - KG105C	Rated Voltage	V A. C.	600	600	Ampere Rating	A	10	10	Type of wire	-	Use 60/75°C copper wire only	Use 75°C copper wire only	Temperature rating of wire	°C	60/75	75	Torque value for field wiring terminals	lb-in. Nm	-	-
Technical Data according to UL Specifications		Auxiliary Contacts KG20 - KG64B	Auxiliary Contacts KG80 - KG105C																						
Rated Voltage	V A. C.	600	600																						
Ampere Rating	A	10	10																						
Type of wire	-	Use 60/75°C copper wire only	Use 75°C copper wire only																						
Temperature rating of wire	°C	60/75	75																						
Torque value for field wiring terminals	lb-in. Nm	-	-																						
AUX.CONT.																									
Operating temperature																									
Min. Temperature [°C]	Max. Temperature [°C]																								
-5	55																								
Waste Electrical & Electronic Equipment (WEEE)																									
Picture name	Description																								
																									
 Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com																									
Proposition 65																									
Picture name	Description																								
																									
WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.																									

Mounting-KL11V



IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 5,00
A	H	190,00 mm
B	H	100,00 mm
C	H	178,00 mm
D2		4,00 x M25
D6		2,00 x M25
H	H	93,00 mm



Wiring diagram

KG64.T304.KL11V



Kraus & Naimer

KG64
T304
Page 1 of 1

Face Plate									
		L1	L2	L3	N				
		1	3	5	7	9	11	13	15
									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3	N				
0	270								
1	0	■	■	■	■				
	90								
	180								

Version: 94

Face plate

S1.F656/E10.V9

