

Features

- START Panel IP44 is a range of backlit LED panels used in recessed ceilings. Ideal for general indoor applications such as corridors, breakrooms, offices and meeting rooms. Luminaire dimensions are compatible with common ceiling installation, and the shallow design makes it easy to install in low ceilings. Nominal size 600x600mm, 4300Lm; 34W; 126Lm/W; Average lifespan: 100.000Hrs; 4000K; CRI 80; Glare control <19; IK03; IP44 (from the front); SDCM<3; Class II; DALI dimmable.


Product Overview

Product name	ST Panel UGR19 600x600 HE IP44 DALI 4300 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium, Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4278345
Fixture luminous flux (lm)	4300
Luminaire efficacy (lm/W)	126
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	34
Electrical protection	Class II

ST Panel UGR19 600x600 HE IP44 DALI 4300 840 0042639

Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288426396
Warranty	5 years
Dimming method	DALI
Useful luminous flux (#use)	4300

Photometry

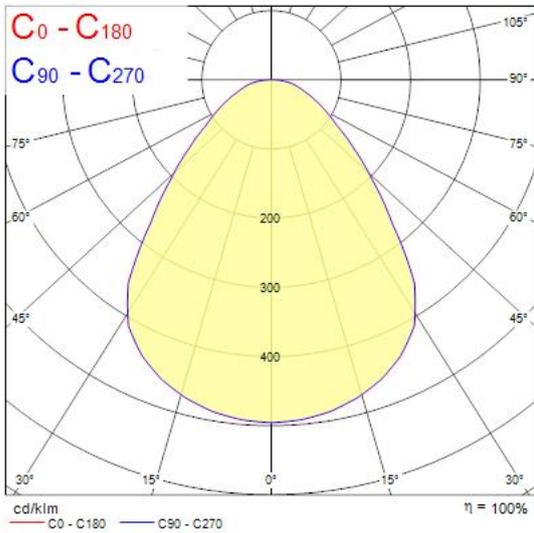

Technical drawings

