

Product data sheet Spirotech

Product name

SpiroTrap MB3 -22mm -Magnet -Uni

Article number

UE022WJ

Product properties


Product image

A brass dirt separator with magnet and a 22 mm - 2" universal connection

- Very small particles, from 5 μm (= 0.005 mm) are separated and removed
- Including a magnet for extra protection and high efficient removal of magnetite
- Dirt can be drained while the system is in operation
- No shut-off valves or bypass required
- Applicable with 50/50 Ethylene Glycol / Water (Volume)
- Constant low pressure drop
- Maintenance only takes a few seconds and is not a dirty job
- No unnecessary downtime
- Connection diameters from 22 mm - 2" (G2)



Product dimensions

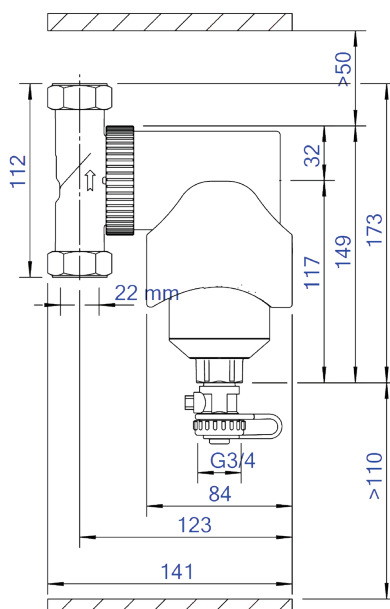

Product data sheet Spirotech

ETIM product data

Housing material	Brass	Suitable for closed system	Yes
With drain valve	Yes	Suitable for solar	No
Housing material quality	Other	Whirl operating principle	No
Backwash filter	No	Negative pressure operating principle	No
Max. operating pressure	10 bar	With dismountable filter	No
Kvs value	9.07	Filter volume	0.36 l
Variable flow direction	Yes	Magnet operating principle	Yes
With insulation	No	Thrust operating principle	No
Separator type	Dirt	With automatic de-aerator	No
Connection	Compression ring	Partial flow principle	No
Model	Horizontal/vertical	Principle full flow with settling	Yes
Nominal diameter	Other	With integrated replenishment automat	No
Max. glycol mixture	50 %	With couplers	Yes
Suitable for heating	Yes	Cleaning possible during operation	Yes
Suitable for cooling	Yes	Material of connection	Brass
Outer pipe diameter	22 mm	Inlet/outlet offset distance	0 mm
Construction length	92 mm	Material quality connection	Other
Article compression class	PN 10	Operating principle	Magnet
Surface protection	Untreated	Magnet location	External
Suitable for open system	No		

Disclaimer

This product sheet has been compiled with the greatest possible care. Nevertheless, it may contain errors or omissions. For the most current and correct information we refer you to our website.

